

# **Submittal Data Sheet**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

### Performance

Indoor Unit Model No:	FTXS24LVJU
Outdoor Unit Model No:	
Rated Cooling Capacity (Btu/hr):	21000
Sensible Capacity (Btu/hr):	N/A
Max/Min Cooling Capacity (Btu/hr / kW):	atabook/databook
Cooling Input Power (kW):	
SEER:	data book
Rated Heating Capacity (Btu/hr):	25400
Max/Min Heating Capacity (Btu/hr / kW):	atabook/databook
Heating Input Power (kW):	
Heating COP (Btu/hr / Btu/hr):	data book
HSPF:	data book

### Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min Circuit Amps MCA (A):	data book
Max Overcurrent Amps MFA (A):	data book
Dimensions (HxWxD):	13-3/8x41-5/16x9-3/4
Panel (HxWxD):	N/A
Net Weight (lbs):	31
Weight with Panel (lbs):	

## **Condensing Unit Details**

Power Supply (V/Hz/Ph):	
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	
Max. Overcurrent Amps MFA (A):	
Max. Starting Current MSC(A):	data book
Rated Load Amps RLA (A):	data book
Dimensions (HxWxD):	30-5/16x35-7/16x12-5/8
Net Weight (lbs):	

## System Details

Refrigerant Type:	R-410A
Holding Refrigerant Charge (lbs):	-
Additional Charge (oz/ft):	-
Pre-charge Piping (Length ft):	-
Max. Pipe Length (Total ft):	data book

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

#### Indoor Unit Type: Mounted (Used only with RMXS48LVJU) Condensing Unit Type:

Rated Cooling Conditions	Indoor: 80 ℉ DB/67 ℉ WB Outdoor: 95 ℉ DB/75 ℉ WB
Rated Heating Conditions	Indoor: 70 ℉ DB/60 ℉ WB Outdoor: 47 ℉ DB/43 ℉ WB
Rated Piping Length(ft)	25
Rated Height Separation(ft)	0

Airflow Rate (CFM wet coil)	643/494/350/328
Moisture Removal (pt/h):	1.2
Gas Pipe Connection (inch):	5/8
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	5/8
Sound Pressure Level (dBA):	51
Sound Power Level (dBA):	67
Static Pressure Rated/Max (inWg)	0 / 0/0

Compressor Type:	Inverter
Capacity Control Range (%):	
Airflow Rate (CFM):	N/A
Gas Pipe Connection (inch):	
Liquid Pipe Connection (inch):	
Sound Pressure Level (dBA):	
Sound Power Level (dBA):	

Max. Pipe Length (Vertical ft):	data book
Cooling Operation Range ( °F):	14 - 115
Cooling Range w/Baffle ( °F):	
Heating Operation Range ( °F):	5 - 64
Heating Range w/Baffle ( °F):	




# Submittal Data Sheet

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

# **Dimensional Drawing - Indoor Unit**

FTXS24LVJU

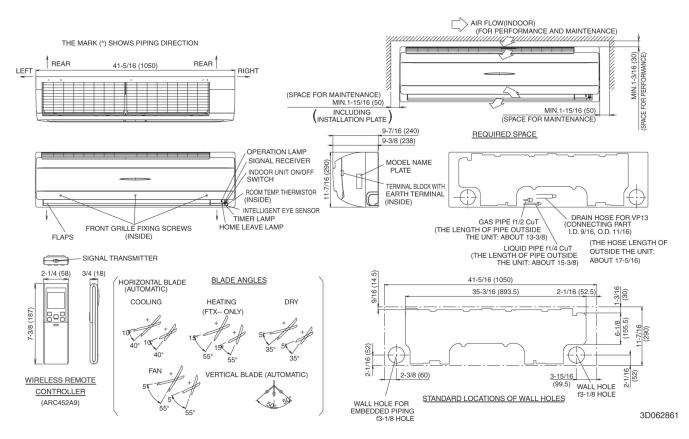

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006




# Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



# FTXS24LVJU

Std U.S. Warranty: 7yrs Compressor, 1yrs Parts



Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006