

M9220 Series Electric Spring-Return Actuators

Description

The M9220-xxx-3 actuators are direct-mount, spring-return electric actuators that operate with these available power options:

- AC 24 V at 50/60 Hz or DC 24 V (AGx, BGx, GGx, HGx)
- AC 120 V at 60 Hz (BAX)
- AC 230 V at 50/60 Hz (BDx)

These bidirectional actuators do not require a damper linkage, and are easily installed on dampers with 1/2 to 3/4 in. or 12 to 19 mm round shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm square shafts using the standard shaft clamp included with the actuator. An optional M9220-600 Jackshaft Coupler Kit is available for 3/4 to 1-1/16 in. or 19 to 27 mm round shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm square shafts.

A single M9220-xxx-3 Electric Spring-Return Actuator provides a running and spring-return torque of 177 lb-in (20 N-m). Two or three models mounted in tandem deliver twice or triple the torque. Integral line voltage auxiliary switches are available on the -xxC models to indicate end-stop position or to perform switching functions within the selected rotation range.

Refer to the *M9220-xxx-3 Electric Spring-Return Actuators Product Bulletin (LIT-12011057)* for important product application information.

Features

- Available Torques of 177 lb-in (20 N-m) for Single Actuators, 354 lb-in (40 N-m) for Two Models, and 531 lb-in (60 N-m) for Three Models Mounted in Tandem — offer a selection that is most suitable for the application.
- Reversible Mounting Design — simplifies installation and enables the actuator to spring return in either direction.
- Electronic Stall Detection throughout Entire Rotation Range — extends the life of the actuator by deactivating the actuator motor when an overload condition is detected.
- Removable Coupler — adapts to a shorter damper shaft.
- Integral 48 in. (1.2 m) Halogen-Free Cables with Colored and Numbered Conductors — simplify field wiring.
- Integral Auxiliary Switches (xxC Models) — provide one fixed and one adjustable switch point with line voltage capability.
- NEMA 2 (IP54) Rated Aluminum Enclosure — protects the internal components of the actuator from dirt and moisture.
- Easy-to-Use Locking Manual Override with Auto Release and Crank Storage — allows for manual positioning of the actuator hub.
- Integral Connectors for 3/8 in. Flexible Metal Conduit — simplify installation and field wiring.
- Microprocessor-Controlled Brushless DC Motor (-AGx, -GGx, and -HGx types) — provides constant run-time independent of torque.



M9220 Series Electric Spring-Return Actuator

Applications

The M9220-xxx-3 Electric Spring-Return Actuators provide reliable control of dampers and valves in HVAC systems. The M9220-xxx-3 Actuators are available for use with on/off, floating, and proportional controllers.

Repair Information

If the M9220 Series Electric Actuator fails to operate within its specifications, replace the unit. For a replacement actuator, contact the nearest Johnson Controls® representative.

Selection Chart

Code Number	Control Type	Auxiliary Switches	Power Requirements
M9220-AGA-3	Floating	None	AC 24 V at 50/60 Hz or DC 24 V
M9220-AGC-3	Floating	Two	AC 24 V at 50/60 Hz or DC 24 V
M9220-BAA-3	On/Off	None	AC 120 V at 60 Hz
M9220-BAC-3	On/Off	Two	AC 120 V at 60 Hz
M9220-BDA-3	On/Off	None	AC 230 V at 50/60 Hz
M9220-BDC-3	On/Off	Two	AC 230 V at 50/60 Hz
M9220-BGA-3	On/Off	None	AC 24 V at 50/60 Hz or DC 24 V
M9220-BGC-3	On/Off	Two	AC 24 V at 50/60 Hz or DC 24 V
M9220-GGA-3	Proportional	None	AC 24 V at 50/60 Hz or DC 24 V
M9220-GGC-3	Proportional	Two	AC 24 V at 50/60 Hz or DC 24 V
M9220-HGA-3	Proportional with Adjustable Zero and Span	None	AC 24 V at 50/60 Hz or DC 24 V
M9220-HGC-3	Proportional with Adjustable Zero and Span	Two	AC 24 V at 50/60 Hz or DC 24 V

M9220 Series Electric Spring-Return Actuators (Continued)


Accessories

Code Number	Description
DMPR-KC003¹	7 in. (178 mm) Blade Pin Extension (without Bracket) for Johnson Controls Direct-Mount Damper Applications (Quantity 5)
M9000-153	Crankarm (Quantity 1)
M9000-158	Tandem Mounting Kit Used to Mount Two Models of M9220-xxx-3 Series Proportional Electric Spring-Return Actuators (Quantity 1)
M9000-170	Remote Mounting Kit, Horizontal. Kit Includes Mounting Bracket, M9000-153 Crankarm, Ball Joint, and Mounting Bolts (Quantity 1)
M9000-171	Remote Mounting Kit, Vertical. Kit Includes Mounting Bracket, M9000-153 Crankarm, Ball Joint, and Mounting Bolts (Quantity 1)
M9000-200	Commissioning Tool that Provides a Control Signal to Drive 24 V On/Off, Floating, Proportional, and/or Resistive Electric Actuators (Quantity 1)
M9000-320	Weather Shield Enclosure - NEMA 3R Enclosure for Protecting a Single M9210/20 Actuator from Rain, Sleet, or Snow (Quantity 1)
M9000-400	Jackshaft Linkage Kit. Open-Ended Design Enables Clamping onto a Jackshaft without Requiring Access to the Ends of the Jackshaft (Quantity 1)
M9000-604	Replacement Anti-Rotation Bracket Kit (with Screws) for M9220-xxx-3 Series Proportional Electric Spring-Return Actuators (Quantity 1)
M9200-100	Threaded Conduit Adapter, 1/2 NPSM, for M9210(20) and M(VA)9208 Series Actuators (Quantity 5)
M9220-600	1 in. (25 mm) Jackshaft Coupler Kit (with Locking Clip) for Mounting M9220-xxx-3 Proportional Electric Spring-Return Actuators on Dampers with 3/4 to 1-1/16 in. or 19 to 27 mm Round Shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm Square Shafts (Quantity 1)
M9220-601	Replacement Coupler Kit (with Locking Clip) for Mounting M9220-xxx-3 Proportional Electric Spring-Return Actuators on Dampers with 1/2 to 3/4 in. or 12 to 19 mm Round Shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm Square Shafts (Quantity 1)
M9220-602	Replacement Locking Clips for M9220-xxx-3 Proportional Electric Spring-Return Actuators (Five per Bag)
M9220-603	Adjustable Stop Kit for M9220-xxx-3 Proportional Electric Spring-Return Actuators (Quantity 1)
M9220-604	Replacement Manual Override Cranks for M9220-xxx-3 Proportional Electric Spring-Return Actuators (Five per Bag)
M9220-610	Replacement Shaft Gripper, 10 mm Square Shaft with Locking Clip (Quantity 1)
M9220-612	Replacement Shaft Gripper, 12 mm Square Shaft with Locking Clip (Quantity 1)
M9220-614	Replacement Shaft Gripper, 14 mm Square Shaft with Locking Clip (Quantity 1)

1. Furnished with the damper and may be ordered separately

M9220 Series Electric Spring-Return Actuators (Continued)

Dimensions

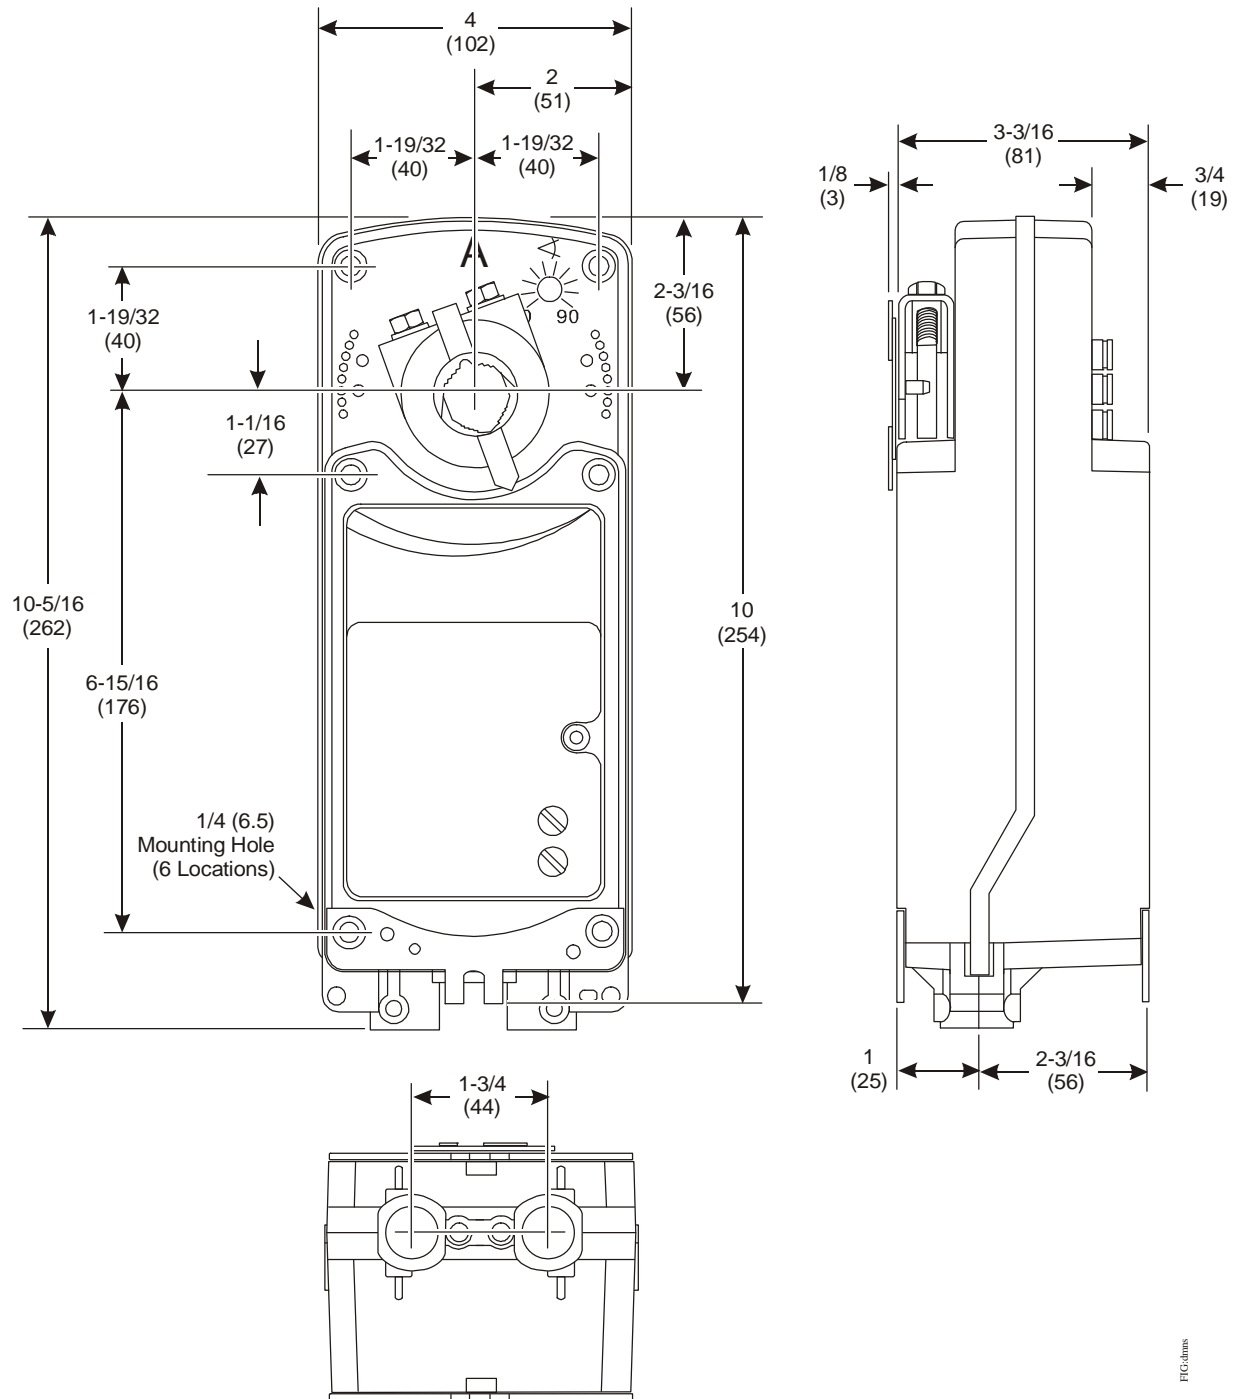

M9220-xxx-3 Electric Spring-Return Actuator Dimensions, in. (mm)

FIG. 3

M9220 Series Electric Spring-Return Actuators (Continued)

Technical Specifications

M9220 Series Electric Spring-Return Actuators (Part 1 of 2)		
Product Codes		M9220-AGx-3 Models: Floating M9220-Bxx-3 Models: On/Off M9220-GGx-3 Models: Proportional M9220-HGx-3 Models: Proportional Adjustable
Power Requirements	AGx, HGx, GGx Models	AC 24 V (19.2 to 30 V) at 50/60 Hz: Class 2, 15.5 VA Running, 7.7 VA Holding Position; DC 24 V (21.6 to 26.4 V): Class 2, 6.7 W Running, 2.9 W Holding Position
	BAx Models	AC 120 V (AC 102 to 132 V) at 60 Hz: 0.25 A Running, 0.13 A Holding Position
	BDx Models	AC 230 V (AC 198 to 264 V) at 50/60 Hz: 0.15 A Running, 0.09 A Holding Position
	BGx Models	AC 24 V (19.2 to 30 V) at 50/60 Hz: Class 2, 24.6 VA Running, 7.7 VA Holding Position; DC 24 V (21.6 to 26.4 V): Class 2, 17.6 W Running, 2.8 W Holding Position
Transformer Sizing Requirements	AGx, HGx, GGx Models	20 VA Minimum per Actuator
	Bxx Models	25 VA Minimum per Actuator
Input Signal/Adjustments	AGx Models	DC 0 (2) to 10 V or 0 (4) to 20 mA with Field Furnished 500 Ohm Resistor; Switch Selectable Direct or Reverse Action with Signal Increase, 500 ms Minimum Pulse Width
	GGx Models	Factory Set DC 0 to 10 V, CW Rotation with Signal Increase; Selectable DC 0 (2) to 10 V or 0 (4) to 20 mA with Field Furnished 500 Ohm, 0.25 W Minimum Resistor; Switch Selectable Direct or Reverse Action with Signal Increase
	HGx Models	Factory Set DC 0 to 10 V, CW Rotation with Signal Increase; Selectable DC 0 to 10 V or 0 to 20 mA with Field Furnished 500 Ohm, 0.25 W Minimum Resistor; Start Point Programmable DC 0 to 10 V; Span Programmable DC 2 to 10 V; Switch Selectable Direct or Reverse Action with Signal Increase
Control Input Impedance	GGx, HGx Models	Voltage Input: 200,000 Ohms; Current Input: 500 Ohms with Field Furnished 500 Ohm Resistor
Feedback Signal	GGx Models	0 (2) to 10 VDC for Desired Rotation Range up to 90°; Corresponds to Rotation Limits, 1 mA Maximum
	HGx Models	0 to 10 VDC for Desired Rotation Range up to 90°; Corresponds to Rotation Limits, 1 mA Maximum
Auxiliary Switch Rating	xxC Models	Two Single-Pole, Double-Throw (SPDT), Double-Insulated Switches with Gold Flash Contacts: AC 24 V, 50 VA Pilot Duty; AC 120 V, 5.8 A Resistive, 1/4 hp, 275 VA Pilot Duty; AC 240 V, 5.0 A Resistive, 1/4 hp, 275 VA Pilot Duty
Spring Return		Direction is Selectable with Mounting Position of Actuator: Side A, Actuator Face away from Damper for CCW Spring Return; Side B, Actuator Face away from Damper for CW Spring Return
Running and Spring Return Torque		177 lb-in (20 N-m) for a Single Actuator; 354 lb-in (40 N-m) for Two Models Mounted in Tandem 531 lb-in (60 N-m) for Three Models Mounted in Tandem
Valid Tandem Combinations		Two M9220-Bxx-3 Three M9220-AGx-3 One M9220-HGx-3 Master with One or Two M9220-GGx-3 Slaves One M9220-GGx-3 Master with One or Two M9220-GGx-3 Slaves
Rotation Range		Adjustable from 30 to 90° CW or CCW with Optional M9220-603 Adjustable Stop Kit; Mechanically Limited to 90°
Rotation Time Power On (Running)	AGx, HGx, GGx Models	150 Seconds for 0 to 177 lb-in (0 to 20 N-m) at All Operating Conditions; Independent of Load
	BGx Models	24 to 57 Seconds for 0 to 177 lb-in (0 to 20 N-m) at All Operating Conditions; 35 Seconds Nominal at Full Rated Load
Rotation Time Power Off (Spring Returning)	AGx, HGx, GGx Models	20 Seconds for 0 to 177 lb-in (0 to 20 N-m) at Room Temperature
	BGx Models	11 to 15 Seconds for 0 to 177 lb-in (0 to 20 N-m) at Room Temperature; 35 Seconds Maximum for 0 to 177 lb-in (0 to 20 N-m) at -22°F (-30°C) 130 Seconds Maximum for 0 to 177 lb-in (0 to 20 N-m) at -40°F (-40°C)
Cycles		60,000 Full Stroke Cycles; 1,500,000 Repositions
Audible Noise Rating (AGx, HGx, GGx Models)	Power On (Running)	< 40 dBA at 39-13/32 in. (1 m)
	Power On (Holding)	< 20 dBA at 39-13/32 in. (1 m)
	Power Off (Spring Returning)	< 55 dBA at 39-13/32 in. (1 m)

M9220 Series Electric Spring-Return Actuators (Continued)

M9220 Series Electric Spring-Return Actuators (Part 2 of 2)		
Audible Noise Rating (BGx Models)	Power On (Running)	< 66 dBA at 39-13/32 in. (1 m)
	Power On (Holding)	< 18 dBA at 39-13/32 in. (1 m)
	Power Off (Spring Returning)	< 66 dBA at 39-13/32 in. (1 m)
Electrical Connections	Actuator (All Models)	48 in. (1.2 m) Halogen-Free Cable with 18 AWG (0.75 mm ²) Wire Leads
	Auxiliary Switches (xxC Models)	48 in. (1.2 m) Halogen-Free Cable with 18 AWG (0.75 mm ²) Wire Leads
Conduit Connections		Integral Connectors for 3/8 in. (10 mm) Flexible Metal Conduit
Mechanical Connections	Standard Shaft Clamp Included with Actuator	1/2 to 3/4 in. or 12 to 19 mm Diameter Round Shafts, or 3/8 and 1/2 in. or 10, 12, and 14 mm Square Shafts
	Optional M9220-600 Jackshaft Coupler Kit	3/4 to 1-1/16 in. or 19 to 27 mm Diameter Round Shafts, or 5/8 and 3/4 in. or 16, 18, and 19 mm Square Shafts
Aluminum Enclosure		NEMA 2 (IP54) for All Mounting Orientations
Ambient Conditions	Operating	-40 to 131°F (-40 to 55°C); 90% RH Maximum, Noncondensing
	Storage	-85 to 185°F (-65 to 85°C); 95% RH Maximum, Noncondensing
Dimensions		See <u>Dimensions</u> .
<div>CE</div> Compliance	United States	UL Listed, CCN XAPX, File E27734; to UL 60730-1A: 2003-08, Ed. 3.1, Automatic Electrical Controls for Household and Similar Use; and UL 60730-2-14: 2002-02, Ed. 1, Part 2, Particular Requirements for Electric Actuators. (Models: All)
	Canada	UL Listed, CCN XAPX7, File E27734; to UL 60730-1:02-CAN/CSA: July 2002, 3rd Ed., Automatic Electrical Controls for Household and Similar Use; and CSA C22.2 No. 24-93 Temperature Indicating and Regulating Equipment (Models: All).
	Europe	CE Mark – Johnson Controls, Inc. declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC.
	Australia and New Zealand	C-Tick Mark, Australia/NZ Emissions Compliant (Models: All)
Shipping Weight	xGx Models	6.4 lb (2.9 kg)
	Bx and BDx Models	7.6 lb (3.5 kg)