

DIVERSITECH®

Made in USA
Capacitor

Made in USA
Capacitor

Made in USA
Capacitor

Made in USA
Capacitor

HEATING PRODUCTS

Preseason Program | Aug 1 - Oct 1 2013

Save up to
10% on selected
preseason
heating products
inside

Order Early!

Preseason Program Period:
August 1, 2013 – October 1, 2013

2013 HEATING PRODUCTS PRESEASON PROGRAM

SPECIAL OFFER

Place a \$3000 qualifying order to ship to a single location and that location will receive a 5% or 10% discount off all specially marked items on this promotion. Look for the starburst to identify the discounted items. DiversiTech will calculate discounts at time of order.

Save up to 10% off selected items with your qualifying order

Igniters

Pilots


Flame Sensors

Gas Connectors

Condensate Switches

Concentric Vents

Must reference promo code **PREHEAT2013** to receive special offer promo. Each order must ship to a single location.

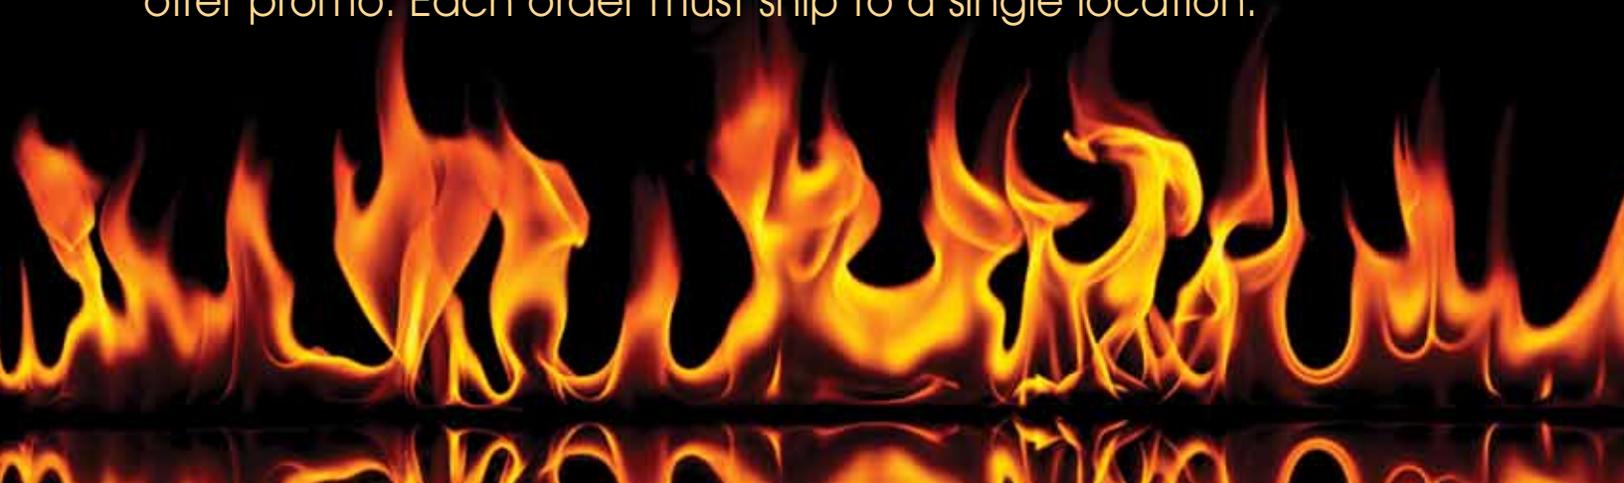

The good old fashioned

American Summer

Take an additional 5% off

This summer we are featuring products made & manufactured right here in the USA!

CAPACITORS

Made in the USA Capacitors

- New line of Made in the U.S.A. capacitors
- Dual voltage - 370V and 440V
- 100% tested
- Fault current protection up to 10,000 amps AFC
- Meets EIA Standard EIA-456-A
- UL Recognized - File # E71645
- CSA File # 223507
- -40°C to 70°C operating range
- -40°C to 90°C storage range
- RoHS compliant
- Service life of 60,000 hours

CATALOG NO.	VOLTAGE	µF	CAN	UOM	ORDER MULTIPLE
45050HU	370V/440V	5	Oval	EA	1
45075HU	370V/440V	7.5	Oval	EA	1
45100HU	370V/440V	10	Oval	EA	1
45150HU	370V/440V	15	Oval	EA	1
45200HU	370V/440V	20	Oval	EA	1
45250HU	370V/440V	25	Oval	EA	1
45300HU	370V/440V	30	Oval	EA	1
45350HU	370V/440V	35	Oval	EA	1
45400HU	370V/440V	40	Oval	EA	1
45450HU	370V/440V	45	Oval	EA	1
45125HU	370V/440V	12.5	Oval	EA	1
45500HU	370V/440V	50	Oval	EA	1
4JR0525U	370V/440V	25+5	Round	EA	1
4JR0530U	370V/440V	30+5	Round	EA	1
4JR0535U	370V/440V	35+5	Round	EA	1
4JR0540U	370V/440V	40+5	Round	EA	1
4JR7540U	370V/440V	40+7.5	Round	EA	1
4JR0545U	370V/440V	45+5	Round	EA	1
4JR7545U	370V/440V	45+7.5	Round	EA	1
4JR0550U	370V/440V	50+5	Round	EA	1
4JR0555U	370V/440V	55+5	Round	EA	1
4JR0560U	370V/440V	60+5	Round	EA	1

TRUESTART® PRODUCTS

TrueStart® Hot Surface Igniters

Featuring protective, dynamic, informative packaging, TrueStart® hot surface igniters are 100% tested, completely reliable, and compatible with all OEM furnaces. They are available as direct replacement for OEM (silicon carbide) or as a universal igniter (silicone carbide or silicon nitride). Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IGN-001	TrueStart® Hot Surface Igniter, Universal, Silicon Carbide	EA	6
IGN-1F	TrueStart® Hot Surface Igniter, Universal, Flat, Silicon Nitride	EA	6
IGN-1R	TrueStart® Hot Surface Igniter, Universal, Round, Silicon Nitride	EA	6
IGN-2	Wolverine Hot Surface Igniter by TrueStart, Universal, Silicon Nitride	EA	6
IGN-401	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6
IGN-402	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6
IGN-403	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6
IGN-409	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6
700-6	Trane 80V Nitride Igniter	EA	12

Take an additional 10% off



GAS

Flame Sensors

TrueStart® flame sensors are a direct replacement for Carrier/BDP flame sensors, cross reference part numbers are detailed in the item descriptions. TrueStart® flame sensors are not manufactured by Carrier Corporation.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
900-3	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ516	EA	1
900-4	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ517	EA	1
900-5	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ518	EA	1
900-6	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ520	EA	1

Take an additional 10% off




Pilot Burners

TrueStart® pilot burners are a direct replacement for Carrier/BDP pilot burners. Available in 2-wire and 3-wire versions. The 3-wire is also field convertible to a 2-wire. TrueStart® pilot burners are not manufactured by Carrier Corporation.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FC-73	2 Wire Pilot Burner – Replacement for the Carrier® 732, 2 wire pilot burner commonly known as Carrier®/BDP part number LH33JZ053	EA	1
FC-74	3 Wire Pilot Burner – Replacement for the Carrier® 740A, 3 wire pilot burner commonly known as Carrier®/BDP part number LH680005	EA	1
FC-82	Blower on Relay – Replacement for the Carrier®/BDP 821 Blower on Relay commonly known as Carrier® part number HN680001	EA	1
FC-87	Spark Electrode – Replacement for the Carrier®/BDP 871 Spark Electrode commonly known as Carrier®/BDP part number LH680512	EA	1

Take an additional 10% off

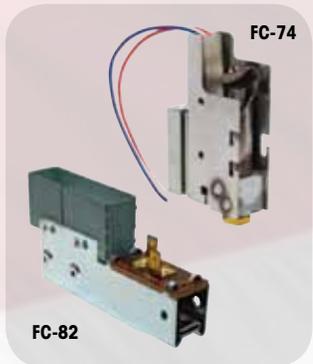

TUBING

Clear Vinyl Tubing

Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-14	1/4" ID Clear Vinyl Tubing	EA	100'
7-38	3/8" ID Clear Vinyl Tubing	EA	100'
7-12	1/2" ID Clear Vinyl Tubing	EA	100'
7-58	5/8" ID Clear Vinyl Tubing	EA	100'
7-34	3/4" ID Clear Vinyl Tubing	EA	100'
7-78	7/8" ID Clear Vinyl Tubing	EA	50'
7-10	1" ID Clear Vinyl Tubing	EA	50'

Take an additional 5% off



FLUSHING PRODUCTS

Pro-Flush™ HVAC Flushing Solvent

For A/C and refrigeration systems formulated for R-410A retrofits, refrigerant conversions and compressor burnouts. Compatible with all refrigerants and compressor oils. All solvents in Pro-Flush™ are non-VOC and conform to EPA SNAP standards: low toxicity and residue-free. Available as a kit or in a 16 oz. solvent refill. The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for 1-stop servicing. The kit includes: 16 oz. container of Pro-Flush™ solvent, refillable Pro-Flush™ injector tool pressure tank, pressure relief valve for added safety, large rubber adapter that flushes up to 1-1/4" line sets, service hose.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PF-KIT	Pro-Flush™ Kit – injector, 16 oz. refill, nozzle adapter and hose	EA	1
PF-16	Pro-Flush™ HVAC Flushing Solvent – 16 oz. Refill	EA	6

Take an additional 5% off

GLYCOLS

ProTek™ PG 50

ProTek™ for closed loop water recirculation systems is a blue liquid. Available in three concentrations: original ProTek-100™, ProTek-50™, and ProTek-Plus™. Each concentration may be further diluted to alter freeze and burst temperatures. Refer to the technical data sheet for specific information.



CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MULTIPLE
PG-50	ProTek-50™ – 1 Gallon Jug	35/65	EA	4
PG-50-5	ProTek-50™ – 5 Gallon Pail	35/65	EA	1
PG-50-55	ProTek-50™ – 55 Gallon Drum	35/65	EA	1
PG-100	ProTek-100™ – 1 Gallon Jug	70/30	EA	4
PG-100-5	ProTek-100™ – 5 Gallon Pail	70/30	EA	1
PG-100-55	ProTek-100™ – 55 Gallon Drum	70/30	EA	1
PG-PLUS	ProTek-Plus™ – 1 Gallon Jug	95/5	EA	4
PG-PLUS-5	ProTek-Plus™ – 5 Gallon Pail	95/5	EA	1
PG-PLUS-55	ProTek-Plus™ – 55 Gallon Drum	95/5	EA	1

Take an additional 5% off

ProTek-BG™ Boiler Grade

A red liquid boiler grade product formulated specifically with corrosion inhibitors necessary for use in water boilers.



CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MULTIPLE
PG-BG	ProTek-BG™ – 1 Gallon Jug	70/30	EA	4
PG-BG-5	ProTek-BG™ – 5 Gallon Pail	70/30	EA	1
PG-BG-55	ProTek-BG™ – 55 Gallon Drum	70/30	EA	1

Take an additional 5% off

ProTek EG™

An inhibited ethylene glycol based heat transfer fluid designed for use in hydronic, chilled and closed water.



CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MULTIPLE
EG	ProTek EG™ – 1 Gallon Jug	95/5	EA	4
EG-5	ProTek EG™ – 5 Gallon Pail	95/5	EA	1
EG-55	ProTek EG™ – 55 Gallon Drum	95/5	EA	1

Take an additional 5% off

ProTek PG™ – Aluminum Safe

Universal heat transfer fluid. An inhibited heat transfer fluid that is safe for use in boilers and hydronic systems including aluminum heat exchangers. Operating range is -100°F to 190°F. ProTek™ PG-AL is an orange liquid.




CATALOG NO.	DESCRIPTION	GLYCOL/WATER RATIO	UOM	ORDER MULTIPLE
PG-AL	ProTek™ PG-AL – 1 Gallon Jug	70/30	EA	4
PG-AL-5	ProTek™ PG-AL – 5 Gallon Pail	70/30	EA	1
PG-AL-55	ProTek™ PG-AL – 55 Gallon Drum	70/30	EA	1

Take an additional 5% off

CLADLITE® LIGHTWEIGHT EQUIPMENT PADS

Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered encapsulated polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. CladLite® is further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.



2" CladLite® Pads

The 2" thick CladLite® pad is the choice for equipment pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-2	16 X 36	33	25	850	EA	25
2424-2	24 X 24	36	25	913	EA	25
2430-2	24 X 30	37	25	950	EA	25
2436-2	24 X 36	50	25	1,275	EA	25
2442-2	24 X 42	57	25	1,450	EA	25
2448-2	24 X 48	72	25	1,825	EA	25
2454-2	24 X 54	84	25	2,125	EA	25
26-2	26 Round	31	25	800	EA	25
2626-2	26 X 26	38	25	975	EA	25
2636-2	26 X 36	54	25	1,375	EA	25
2660-2	26 X 60	95	25	2,400	EA	25
2838-2	28 X 38	55	25	1,400	EA	25
30-2	30 Round	36	25	925	EA	25
3030-2	30 X 30	48	25	1,225	EA	25
3036-2	30 X 36	60	25	1,525	EA	25
3040-2	30 X 40	70	25	1,775	EA	25
3060-2	30 X 60	112	25	2,825	EA	25
3143-2	31 X 43	83	25	2,100	EA	25
32-2	32 Round	44	25	1,125	EA	25
3232-2	32 X 32	54	25	1,375	EA	25
3237-2	32 X 37	66	25	1,675	EA	25
3434-2	34 X 34	63	25	1,600	EA	25
36-2	36 Round	51	25	1,300	EA	25
3636-2	36 X 36	76	25	1,925	EA	25
3640-2	36 X 40	81	25	2,050	EA	25
3648-2	36 X 48	115	25	2,900	EA	25
3654-2	36 X 54	93	25	2,350	EA	25
3842-2	38 X 42	81	25	2,100	EA	25
4147-2	41 X 47	115	25	2,900	EA	25
4848-2	48 X 48	100	25	2,525	EA	25

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

3" CladLite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-3	16 X 36	46	20	945	EA	20
2424-3	24 X 24	49	20	995	EA	20
2430-3	24 X 30	57	20	1,165	EA	20
2436-3	24 X 36	63	20	1,285	EA	20
2448-3	24 X 48	71	20	1,445	EA	20
2460-3	24 X 60	105	20	2,125	EA	20
2626-3	26 X 26	53	20	1,085	EA	20
2660-3	26 X 60	109	20	2,205	EA	20
2838-3	28 X 38	84	20	1,705	EA	20
3030-3	30 X 30	62	20	1,265	EA	20
3036-3	30 X 36	71	20	1,445	EA	20
3040-3	30 X 40	94	20	1,905	EA	20
3060-3	30 X 60	130	15	1,975	EA	15
3143-3	31 X 43	74	20	1,505	EA	20
32-3	32 Round	67	20	1,365	EA	20
3232-3	32 X 32	68	20	1,385	EA	20
3237-3	32 X 37	87	20	1,765	EA	20
3345-3	33 X 45	117	20	2,365	EA	20
3434-3	34 X 34	86	20	1,770	EA	20
3465-3	34 X 65	160	15	2,425	EA	15
36-3	36 Round	80	20	1,625	EA	20
3636-3	36 X 36	100	20	2,025	EA	20
3640-3	36 X 40	120	20	2,425	EA	20
3648-3	36 X 48	132	20	2,665	EA	20
3650-3	36 X 50	137	15	2,080	EA	15
3660-3	36 X 60	163	15	2,470	EA	15
3678-3	36 X 78	196	10	1,985	EA	10
3842-3	38 X 42	132	20	2,700	EA	20
3865-3	38 X 65	179	15	2,710	EA	15
3870-3	38 X 70	179	10	1,815	EA	10
4042-3	40 X 42	170	10	1,700	EA	10
4054-3	40 X 54	167	15	2,530	EA	15
4062-3	40 X 62	179	10	1,815	EA	10
4147-3	41 X 47	140	15	2,125	EA	15
4183-3	41 X 83	231	10	2,335	EA	10
4550-3	45 X 50	158	15	2,395	EA	15
4558-3	45 X 58	177	15	2,680	EA	15
4766-3	47 X 66	219	10	2,215	EA	10
4848-3	48 X 48	150	15	2,275	EA	15
5053-3	50 X 53	194	15	2,935	EA	15
5056-3	50 X 56	212	10	2,145	EA	10
5058-3	50 X 58	212	10	2,145	EA	10
5070-3	50 X 70	257	10	2,595	EA	10
5252-3	52 X 52	197	10	1,995	EA	10
5557-3	55 X 57	237	10	2,395	EA	10
6067-3	60 X 67	284	10	2,865	EA	10

CONDUIT

Liquid Tite Flexible Conduit

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-12100	1/2" x 100' Liquid Tite Conduit - Non-Metallic, 100' per roll	EA	1
750-34100	3/4" x 100' Liquid Tite Conduit - Non-Metallic, 100' per roll	EA	1

Take an additional 5% off



ULTRALITE® LIGHTWEIGHT EQUIPMENT PADS

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered encapsulated polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



UC2424-2

2" UltraLite® Pads

The 2" thick UltraLite® pad is the industry standard. Used across a wide variety of applications, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-2	16 X 36	11	20	250	EA	20
UC2424-2	24 X 24	15	20	323	EA	20
UC2430-2	24 X 30	17	20	361	EA	20
UC2436-2	24 X 36	22	20	455	EA	20
UC2448-2	24 X 48	18	20	385	EA	20
UC2626-2	26 X 26	17	20	365	EA	20
UC2628-2	26 X 28	19	20	397	EA	20
UC3030-2	30 X 30	21	20	441	EA	20
UC3036-2	30 X 36	27	20	571	EA	20
UC3040-2	30 X 40	30	20	617	EA	20
UC3143-2	31 X 43	26	20	551	EA	20
UC3232-2	32 X 32	24	20	501	EA	20
UC3234-2	32 X 34	23	20	485	EA	20
UC3237-2	32 X 37	28	20	579	EA	20
UC3434-2	34 X 34	23	20	493	EA	20
UC3445-2	34 X 45	45	20	915	EA	20
UC3636-2	36 X 36	27	20	555	EA	20
UC3640-2	36 X 40	29	20	608	EA	20
UC3648-2	36 X 48	35	20	725	EA	20
UC3842-2	38 X 42	30	20	625	EA	20
UC4040-2	40 X 40	32	20	644	EA	20
UC4147-2	41 X 47	39	20	805	EA	20

U.S. Patents 7,334,385; 7,232,589; 6,931,822; 6,927,183; 5,728,458; 5,664,394; 5,268,226; 5,209,968, and patents pending. ICBO PFC-5112.

3" UltraLite® Pads

Where local codes supersede the International code and require a pad thicker than 2" — 3" UltraLite® is the solution.



UC2424-3

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-3	16 X 36	18	15	297	EA	15
UC1838-3	18 X 38	18	15	297	EA	15
UC2424-3	24 X 24	18	15	294	EA	15
UC2430-3	24 X 30	21	15	339	EA	15
UC2436-3	24 X 36	26	15	412	EA	15
UC2442-3	24 X 42	28	15	441	EA	15
UC2448-3	24 X 48	28	15	443	EA	15
UC2626-3	26 X 26	17	15	279	EA	15
UC2636-3	26 X 36	29	15	428	EA	15
U2660-3	26 X 60	55	15	850	EA	15
UC2838-3	28 X 38	30	15	471	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	30	15	471	EA	15
UC3040-3	30 X 40	33	15	517	EA	15
UC3048-3	30 X 48	40	15	625	EA	15
U3060-3	30 X 60	63	15	970	EA	15
UC3232-3	32 X 32	26	15	411	EA	15
UC3237-3	32 X 37	27	15	436	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	427	EA	15
UC3445-3	34 X 45	39	15	612	EA	15
U3465-3	34 X 65	71	15	1,090	EA	15
UC3636-3	36 X 36	34	15	528	EA	15
UC3642-3	36 X 42	32	15	510	EA	15
UC3648-3	36 X 48	37	15	579	EA	15
U3650-3	36 X 50	38	15	595	EA	15
U3654-3	36 X 54	71	15	1,096	EA	15
U3660-3	36 X 60	49	15	767	EA	15
U3678-3	36 X 78	99	15	1,510	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	510	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
UC4347-3	43 X 47	60	15	925	EA	15
U4550-3	45 X 50	81	15	1,240	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5075-3	50 X 75	130	15	1,975	EA	15
U5079-3	50 X 79	145	15	2,200	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5260-3	52 X 60	109	15	1,660	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15
U6067-3	60 X 67	134	15	2,035	EA	15

E LITE® PLASTIC EQUIPMENT PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



2" E Lite® Pads

The 2" thick E Lite® pad is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL2424-2	24 X 24	7	44	333	EA	44
EL2430-2	24 X 30	9	22	219	EA	22
EL2436-2	24 X 36	11	22	256	EA	22
EL2626-2	26 X 26	8	22	205	EA	22
EL3030-2	30 X 30	11	22	265	EA	22
EL3036-2	30 X 36	13	22	313	EA	22
EL3040-2	30 X 40	15	22	346	EA	22
EL3232-2	32 X 32	13	22	300	EA	22
EL3238-2	32 X 38	15	22	351	EA	22
EL3244-2	32 X 44	17	22	401	EA	22
EL3434-2	34 X 34	14	22	350	EA	22
EL3636-2	36 X 36	16	22	373	EA	22
EL3640-2	36 X 40	18	22	410	EA	22
EL3648-2	36 X 48	29	22	663	EA	22
EL3842-2	38 X 42	19	22	470	EA	22

3" E Lite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL1838-3	18 X 38	16	16	300	EA	16
EL2424-3	24 X 24	13	16	225	EA	16
EL2430-3	24 X 30	16	16	277	EA	16
EL2436-3	24 X 36	19	16	321	EA	16
EL3030-3	30 X 30	20	16	345	EA	16
EL3040-3	30 X 40	26	16	448	EA	16
EL3232-3	32 X 32	21	16	353	EA	16
EL3238-3	32 X 38	26	16	448	EA	16
EL3244-3	32 X 44	30	16	499	EA	16
EL3636-3	36 X 36	28	16	471	EA	16
EL3640-3	36 X 40	31	16	521	EA	16
EL3648-3	36 X 48	36	16	601	EA	16
EL3842-3	38 X 42	33	16	575	EA	16
EL3870-3	38 X 70	36	16	604	EA	16
EL4040-3	40 X 40	31	16	546	EA	16
EL4558-3	45 X 58	33	16	545	EA	16
EL4848-3	48 X 48	29	16	481	EA	16
EL4872-3	48 X 72	72	16	1,177	EA	16
EL5252-3	52 X 52	48	16	793	EA	16
EL5658-3	56 X 58	43	16	715	EA	16

DRAIN PANS

A/C Secondary Condensate Drain Pans

Rolled edges for durability, ribbed bottoms for rigidity, and reinforced corners for strength. 3/4" PVC fittings are included with each pan. No seams, no rust, and no leakage. ABS materials will not put out toxic smoke. Available in over 20 convenient sizes. Five pans per clip. Complies with Southern Building Code.

CATALOG NO.	BOTTOM DIMENSION IN.	BOTTOM DIMENSION CM.	OVERALL DIMENSION IN.	OVERALL DIMENSION CM.	DEPTH IN.	DEPTH CM.	UOM	ORDER MULTIPLE
6-2739L	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5
6-2748L	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
6-2763L	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5
6-3030L	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5
6-3050L	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5
6-3060L	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3263L	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5

L = Drain Line Outlets in Long Side

70 DiversiTech drain pans fit in the same space as 6 conventional 2" deep non-nesting drain pans!



Take an additional 5% off

HEAT PUMP RISERS

Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one-piece, heavy-duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise. Available in 1 or 2 piece risers.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HPR-3	Riser - 3"	EA	48
HPR-6	Riser - 6"	EA	36
HPR-3-2P	Two Piece Riser - 3"	EA	32
HPR-6-2P	Two Piece Riser - 6"	EA	16
HPR-3-2PG	Two Piece Dark Gray Riser - 3"	EA	32
HPR-6-2PG	Two Piece Dark Gray Riser - 6"	EA	16

Take an additional 5% off



PVC DWV FITTINGS

45 Elbows

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-321020	2" 45 Elbow (Hub x Hub)	EA	50
5-321030	3" 45 Elbow (Hub x Hub)	EA	20
510-D323020	2" 45 Street Elbow (Hub x SPIG)	EA	50
510-D323030	3" 45 Street Elbow (Hub x SPIG)	EA	20

Take an additional 5% off

510-D304020



90 Elbow (Hub x Hub)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-300020	2" 90 Elbow (Hub x Hub)	EA	50
510-D304020	2" Long Sweep 90 Elbow (Hub x Hub)	EA	25
5-300030	3" 90 Elbow (Hub x Hub)	EA	25
510-D304030	3" Long Sweep 90 Elbow (Hub x Hub)	EA	10

Take an additional 5% off

5-300020



DWV Vent Tee

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
510-D441020	2" Vent Tee	EA	25
510-D441030	3" Vent Tee	EA	10

Take an additional 5% off

510-D441020



Couplings (Hub x Hub)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-100020	2" Couplings (Hub x Hub)	EA	100
5-100030	3" Couplings (Hub x Hub)	EA	60
510-D102251	2" x 1-1/2" Couplings (Hub x Hub)	EA	25
510-D102338	3" x 2" Couplings (Hub x Hub)	EA	20

Take an additional 5% off

5-100020



DWV Bend Fittings

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-300050	2" Street Ell (hub x spigot)	EA	50
5-300060	3" Street Ell (hub x spigot)	EA	20
510-D309020	2" Long Sweep (hub x spigot)	EA	25
510-D309030	3" Long Sweep (hub x spigot)	EA	20

Take an additional 5% off

5-300050



SEALING COMPOUNDS

Pan-Patch™

A two part epoxy coating with anti-microbial additives designed for HVAC applications. A self leveling formula that is ideal in a damp or wet environment. Pan-Patch™ resists corrosion and stops pan leaks without replacing the pan. Light gray in color, one gallon covers about 160 square feet with 10 mil thickness.

CATALOG NO.	DESCRIPTION	COVERAGE	UOM	ORDER MULTIPLE
PANPATCH-BAG	Pan-Patch™ Pan Sealant – bag, pack of 10	8 sq. ft.	PK	1
PANPATCH-32	Pan-Patch™ Pan Sealant – 1 quart	40 sq. ft.	EA	9
PANPATCH	Pan-Patch™ Pan Sealant – 1 gallon	160 sq. ft.	EA	4

Take an additional 5% off

PANPATCH-BAG



TrueStart® Hot Surface Igniters



*TrueStart® hot surface igniters have been
100% tested and approved.*

*TrueStart® hot surface igniters are completely
reliable right out of the package and are certified
by CSA for use in electrical equipment.*





TrueStart® universal hot surface igniters by DiversiTech are high quality replacements that fit hundreds of OEM components. TrueStart® universal igniters are durable and are designed to provide years of reliable service.

BUILT TO LAST

TrueStart® universal igniters are available in silicon nitride and silicon carbide models. Silicon nitride is a very durable ceramic that is high fracture and temperature resistant and has a long life expectancy. Silicon nitride is a longer lasting material that is also more shock resistant. Silicon carbide is a naturally high temperature resistant metal that has been the standard used in heating equipment for years.

JUST ONE REPLACES HUNDREDS

TrueStart® universal hot surface igniters feature a universal bracket kit that can be used to fit most all OEM furnaces. And TrueStart® hot surface igniters feature a unique universal electrical plug kit. This plug kit includes the most common crimp terminals and connector housings to fit the majority of OEM furnaces.

- ✓ *Durable ceramic material*
- ✓ *High thermal shock and chemical resistance*
- ✓ *Fracture resistant*
- ✓ *Long life*

LONG WARRANTY

Every TrueStart® universal igniter includes a generous warranty period to ensure your satisfaction. The warranty on silicon nitride models is 3 full years and the warranty for silicon carbide igniters is 18 months.

100% TESTED

TrueStart® universal hot surface igniters have been 100% tested and approved. TrueStart® hot surface igniters are completely reliable right out of the package and are certified by CSA for use in electrical equipment.



Each TrueStart® Universal Igniter also includes:



A universal bracket kit for a fast, easy installation.



A universal electrical plug connection kit to simplify installation.



Color coded packaging.



Made in U.S.A.



SMOKE AND CARBON MONOXIDE DETECTORS

Combination Ionization Smoke Alarm and Carbon Monoxide Alarm, AC Electrical

- QUICK-DRAW® – convenient pull-out drawer for easy battery replacement
- Silencer Feature – convenient silencer button with automatic reset allows you to temporarily override smoke alarm—ideal for cooking smoke and fireplaces—eliminates nuisance alarms
- 9V Battery Backup in Event of AC Power Failure
- Alkaline Battery Included
- Low Battery Audible Indicator
- Battery Pull-Tab
- Smart Interconnect up to 18 units – with 12 smoke alarms maximum
- Alarm Sounds and Red LED Indicator FLASHES
- 3 LED Alarm Condition Indicators
- Green LED Indicator for AC Power
- Mounting Plate Attached to Junction Box and Covers Dry Wall Cutout – for easy installation and coverage of drywall cutouts
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Includes Dust Cover
- 120 VAC (60 Hz) 0.1 Amp
- Mounts on Single, Gang or 3 1/4" (80mm) Octagon Junction Box
- Five Year Limited Warranty
- UL Listed



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
USI-7795	CO/Smoke Detector, hard wired	EA	6

Take an additional 5% off

Combination Ionization Smoke and Carbon Monoxide Alarm

- Combination Smoke and Carbon Monoxide Alarm
- Separate Sensors to Detect Smoke or Carbon Monoxide
- QUICK-DRAW® – convenient pull-out drawer for easy battery replacement
- Easy Battery Replacement
- Silencer Feature – convenient silencer button with automatic reset allows you to temporarily override smoke alarm—ideal for cooking smoke and fireplaces—eliminates nuisance alarms
- 9 Volt Super Heavy-Duty Battery Included
- LED Alarm Condition Indicators
- Loud 85 dB Alarm
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Test/Silence Button
- Five Year Limited Warranty



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CD-9775-C	CO/Smoke Detector, battery operated	EA	6

Take an additional 5% off

Carbon Monoxide Alarm, Battery, Standard Series

- Battery Operated – Alkaline Battery Included
- Fast and Easy to Install – No Wiring Required
- Optochemical Sensor Technology
 - Resistant to Nuisance Alarms
 - Extends Sensor Life
 - Provides Fail-Safe Notification
- Easy Access Test/Reset Button
- Red Alarm LED
- Loud 85 Decibel Horn
- Audible Low Battery Warning Signal
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Five Year Limited Warranty



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CD-9000-C	CO Detector, battery operated	EA	6

Take an additional 5% off

DIVERSITECH GAS CONNECTORS

DiversiTech Gas Connectors

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D20-3132-18	Gas Connector – 18" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-24	Gas Connector – 24" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-36	Gas Connector – 36" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-48	Gas Connector – 48" long, 1/2" OD x 3/8" ID, M x F	EA	12
D30-3131-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3132-18	Gas Connector – 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x F	EA	12

Take an additional 10% off



Epoxy Coated Gas Connectors

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DC30-3132-18	Gas Connector coated – 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-24	Gas Connector coated – 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-36	Gas Connector coated – 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-48	Gas Connector coated – 48" long, 5/8" OD x 1/2" ID, M x F	EA	12

Take an additional 10% off




ANTI-VIBRATION PADS

E.V.A. Anti-Vibration Pad

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6

Take an additional 5% off




Rubber/Cork Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6

Take an additional 5% off



Iso-Cube Economy Anti-Vibration Pad

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ISO-18W	18" x 18" x 3/4" Iso-Cube	EA	6

Take an additional 5% off



CONDENSATE PUMPS

ClearVue™ Pump

No Float, No Problems! ClearVue's Floatless Sensor™ makes this the most advanced condensate pump ever. This new pump can provide up to 22' of lift if needed. ClearVue™ runs at the minimum speed needed, saving wear on the pump. The pump selects the lowest effective speed, making it quieter than a regular pump. Its unique self-cleaning feature senses problems and automatically enters a self-cleaning mode using condensate water to fix the issue. The ClearVue™ pump features a clear bottom tank to easily check the water level. Other features include: stainless steel mounting tabs, silicone rubber feet, reversible deck, four inlet holes, and LED indicator lights.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IQP-120	ClearVue™ Pump – 120V – 0-22' Lift	EA	6
IQP-120T	ClearVue™ Pump w/Tube – 120V – 0-22' Lift	EA	6

Take an additional 5% off



IQP-120

ClearVue™ Mini Ductless System Pump

Featuring super quiet operation, specifically designed for ductless system installations, and including Floatless Sensor™, ClearVue™ Mini is chock full of innovative features, and priced competitively.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CVMINI	ClearVue Mini - Ductless System Pump	EA	6

Take an additional 5% off



CVMINI

CP-22 Pumps

Suitable for use with condensate from high efficiency condensing furnaces and boilers which produce acidic condensate. 22' of lift compared to the typical 20'. Features include vibration dampening feet and motor mounts, metal hang tabs, four inlet holes, a clear indicator display and a float switch and check valve. Integrating the CP-22 into your system is easy. 1/4" quick connect terminals provide easy connection to the built in overflow switch. 2 terminals are provided allowing flexibility to connect air-handler shut-down.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-22	Condensate Pump – 120V	EA	6
CP-22T	Condensate Pump – 120V w/20' 3/8" Tube	EA	6
CP-22-230	Condensate Pump – 230V	EA	6
CP-22-230T	Condensate Pump – 230V w/20' 3/8" Tube	EA	6

Take an additional 5% off



CP-22

Low Profile Pumps

The new CP-22LP comes packed with all the same great features found in the CP-22, but now in a low profile package. This pump is only 4 3/8" tall so it's a good fit for those instances where space is at a premium. The shorter reservoir holds 1/3 gallon. Suitable for use with condensate up to 160°F.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-22LP	Condensate Pump – 120V – Low Profile	EA	6

Take an additional 5% off



CP-22LP

General Purpose Pumps

DiversiTech's CP-16 condensate pump is an economical alternative that's based off of the proven CP-22 design. More compact than the CP-22, it's designed to lift to a maximum of 16 feet. It shares many of the features of the CP-22, including hang tabs, four inlet holes, float switch, overflow switch, and a check valve.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-16	Condensate Pump 16' Lift 120V	EA	6
CP-16-230	Condensate Pump 16' Lift 230V	EA	6

Take an additional 5% off



CP-16

Find the right pump for your customers right here!

The Industry Leader in Condensate Pump Technology.

DiversiTech offers more choices than anyone else in the industry!



HEATING PRODUCTS PRESEASON




MOTORS, MOTOR MOUNTS

Direct Drive Furnace Blower Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size
- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible
- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840583	1/4	115	1075/3	4.6	EA	1
WG840584	1/4	208-230	1075/3	2.2	EA	1
WG840585	1/3	115	1075/3	6.7	EA	1
WG840586	1/3	208-230	1075/3	2.9	EA	1
WG840587	1/2	115	1075/3	10.2	EA	1
WG840588	1/2	208-230	1075/3	5.0	EA	1
WG840589	3/4	115	1075/3	11.3	EA	1
WG840590	3/4	208-230	1075/3	5.4	EA	1

Take an additional 5% off



Multiple Horsepower Motors

The Multi-Horsepower motors are specially designed to cover a range of applications. The direct drive furnace blower motors range from 1/2 to 1/6 in both 115 and 230 volts and 3/4 to 1/5 in both 115 and 230 volts all at 1075rpm. These motors feature reversing plugs, extended thru bolts 3/6 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.

CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	EA	1
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	EA	1
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	EA	1
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	EA	1

Take an additional 5% off



Motor Mount – Flex Bracket

Torsion Flex Bracket holds motor securely. Fits 5- 1/2" motors. Typically used for Goodman equipment.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-3	5-1/2" Motor Mount Torsion Flex Bracket	EA	1

Take an additional 5% off



FAN CENTERS

Fan Centers

Low voltage for one and two speed fan motors; auxiliary circuits in heating, cooling, or heating/cooling applications.

- DPDT Relay
- UL, CUR file E237660
- Color-coded pre-stripped leads
- 24V coil voltage, power, and duty rated contacts
- Mounts directly to 4" electrical box

CATALOG NO.	VOLTAGE	UOM	ORDER MULTIPLE
D-90113	120	EA	1
D-90118	208/240	EA	1

Take an additional 5% off



DRIERS

Bi Flow Driers

The "DBF" Series is designed specifically for heat pump or reverse cycle application. External check valves are not required since they are incorporated within the filter dryer shell. The core design filters out contaminant particles down to 25 microns. 100% copper sweat or nickel plated flare fittings. Desiccant core provides reliable and effective, removal of solid contaminants, acid and moisture. Provides three times the filtration as the standard bi-flow. Core is cushioned in fiber gaskets to protect core and to insure trouble-free performance. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion.



CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE
DBF083S	V2A-083 Sweat	3/8	8	EA	1
DBF163S	V2A-163 Sweat	3/8	16	EA	1

Take an additional 5% off

SWITCHES

Condensate Switches

DiversiTech Flood Prevention Switches are simple to install, easy to service and extremely reliable. As water level in the auxiliary or main drain pipe rises due to a clogged air conditioning condensate drain, the switch shuts off the system—thus preventing water from overflowing and causing damage to doors, walls and ceilings. At the heart of the switch is a durable yet precise magnetic reed switch. Constructed of materials that will not rust or stick, the switch operates smoothly every time.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CS-1	Condensate Switch – Tee	EA	12
CS-2	Condensate Switch – Elbow	EA	12
CS-3	Condensate Switch – Clip	EA	12

Take an additional 10% off

CS1200 Multi-Position AC Shutoff Switch

The CS1200 is a fast installing, reliable, condensate overflow detection switch. Featuring a unique universal pan mount design to assure accurate detection in metal or plastic secondary drain pans.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CS1200	CS1200 AC Shutoff Switch	EA	12

Take an additional 5% off

WIRE CONNECTORS

Wire Connectors – Screw-On

Color-coded connectors make quick, secure connections for positive continuity. High-dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-001	Gray Screw-On – Size 71B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-002	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-003	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 100PK		1
623-004	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-005	Red Screw-On – Size 76B, #18 to #10 AWG, 600V Max., pack of 100	PK	1

Take an additional 5% off

U.L. Listed. CSA Approved.

SEALING COMPOUNDS

Black Jack® Roof Cement

Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RM-1G	Black Jack All Weather Roof Cement – 1 gallon	EA	6
RM-10	Black Jack All Weather Roof Cement – 10 oz. tube	EA	12

Take an additional 5% off



Silicone Sealant

Food grade 100% RTV Silicone Sealant. Can be used in applications for continuous use to 450°F. UV and water resistant. Long-term flexibility. Non-paintable. Available in 10.3 fl. oz. tube for use in standard caulk gun or in 3 fl. oz. squeeze tube.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-4000	Clear Silicone Sealant – 10.3 fl. oz. Tube	EA	12
7-4100	White Silicone Sealant – 10.3 fl. oz. Tube	EA	12
7-4200	Aluminum Silicone Sealant – 10.3 fl. oz. Tube	EA	12

Take an additional 5% off



High Temp Red Silicone Sealant

A one part non-slumping paste that cures to a tough, rubbery solid at room temperature. Formulated to perform at temperatures ranging from -85°F to 500°F for continuous operation, and to 600°F for intermittent exposure. Tack free cure time – 15 minutes. Full cure time – 24 hours.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-4300	High Temp Red Silicone Sealant – 10.1 oz. Cartridge	EA	12

Take an additional 5% off



WELDING TORCHES

Hand Torch

Combustion tip concentrates heat – reduces brazing time by 40%. This series has been redesigned with a patent pending ceramic igniting 1 piece stainless tip feature as well as a new diaphragm type regulator. Extremely durable with a full 3 year warranty.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
525-TORCH	Hand Torch	EA	1

Take an additional 5% off



Portable Hand Torch

Developed for the professional. This portable torch is built with patented swirl combustion. 360° tip for easy use, rugged brass regulator, easy to clean orifice, and interchangeable tip capability. Designed to operate with a tank of either MAPP or Propane gas.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
525-STK9	Portable Hand Torch	EA	1

Take an additional 5% off



TRANSFORMERS

Transformers – Class 2 1585 UL Recognized

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T1401	40	120	24	EA	1
T1404	40	120/208/240	24	EA	1

Take an additional 5% off



Transformers – Class 2 1585 UL Recognized

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T2401	40	120	24	EA	1
T2403	40	208/240	24	EA	1
T2404	40	120/208/240	24	EA	1

Take an additional 5% off



Transformers – Class 2 1585 UL Recognized

Multi-mount with terminal connection secondary.

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T3401	40	120	24	EA	1
T3403	40	120/208/240	24	EA	1
T3501	50	120/208/240	24	EA	1

Take an additional 5% off



Transformers – Class 2 1585 UL Recognized

Multi-mount with wire connection secondary.

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T5401	40	120	24	EA	1

Take an additional 5% off



Transformers – Class 2 1585 UL Recognized

Heavy duty with external fuse (T67XX) or circuit breaker (T77XX).

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T6752	75	120/208/240	24	EA	1
T6753	75	120/208/240/480	24	EA	1
T7752	75	120/208/240/480	24	EA	1

Take an additional 5% off



FUSES

Blade (Auto) Fuses

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-AT0003	Fuse, Blade, Auto, 3AMP, Purple, Pack of 5	PK	1
626-AT0005	Fuse, Blade, Auto, 5AMP, Purple, Pack of 5	PK	1

Take an additional 5% off



CONTACTORS

Definite Purpose Contactors

Single pole, small frame. These contactors will work with the DD11 auxiliary contacts.



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP30124	30	24	EA	1
DP301120	30	120	EA	1
DP301240	30	240	EA	1

Take an additional 5% off

DP30124



Definite Purpose Contactors

Two pole, small frame. These contactors will work with the DD11 auxiliary contacts.



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP25224	25	24	EA	1
DP252120	25	120	EA	1
DP252240	25	240	EA	1
DP30224	30	24	EA	1
DP302120	30	120	EA	1
DP302240	30	240	EA	1
DP40224	40	24	EA	1
DP402120	40	120	EA	1
DP402240	40	240	EA	1

Take an additional 5% off

DP402120



Definite Purpose Contactors

Three pole, large frame. 30-40 Amp contactors work with the DD11 auxiliary contacts, and 50-90 Amp contactors work with the D10 and D11 auxiliary contacts.



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP30324	30	24	EA	1
DP303120	30	120	EA	1
DP303240	30	240	EA	1
DP40324	40	24	EA	1
DP403120	40	120	EA	1
DP403240	40	240	EA	1
DP50324	50	24	EA	1
DP503120	50	120	EA	1
DP503240	50	240	EA	1
DP60324	60	24	EA	1
DP603120	60	120	EA	1
DP603240	60	240	EA	1
DP75324	75	24	EA	1
DP753120	75	120	EA	1
DP753240	75	240	EA	1
DP90324	90	24	EA	1
DP903120	90	120	EA	1
DP903240	90	240	EA	1

Take an additional 5% off

DP30324



Definite Purpose Contactors

Four pole, large frame. These contactors will work with the DD11 auxiliary contacts.



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP304120	30	120	EA	1
DP30424	30	24	EA	1
DP304240	30	240	EA	1
DP304277	30	277	EA	1
DP404120	40	120	EA	1
DP40424	40	24	EA	1
DP404240	40	240	EA	1
DP404277	40	277	EA	1

Take an additional 5% off

DP304120



VENTILATION PRODUCTS

Concentric Vents and Termination Kits

New Concentric Vents make it easier to have a two-pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home (2" or 3" depending on the furnace), one for each pipe. These vents save time and money by reducing the amount of work required. Available in 2" and 3" intake vent sizes.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CVENT-2	2" Concentric Vent	EA	4
CVENT-3	3" Concentric Vent	EA	4
HVENT-2	2" Low Profile Vent Termination Kit	EA	6
HVENT-3	3" Low Profile Vent Termination Kit	EA	6

Take an additional 10% off



Flue Caps

PVC Flue Caps are an affordable way to protect today's high efficiency furnaces from dirt, moisture and other debris.

- Protection for high efficiency furnaces
- Universal flue cap fits 1.5", 2" and 3" PVC pipe
- Reduces draft inducer motor rust
- Helps to eliminate pressure switch service calls
- Resistant to UV radiation and oxidative degradation
- CSA approved for use in 90% AFUE heating applications


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EC-1	E cap Flue Cap	EA	12

Take an additional 5% off



Duct Fans

Features electrical junction box for UL and code compliant electrical connection. Efficiently increases air circulation, keeps room temperatures consistent, and lowers heating/cooling costs. Metal construction, powerful no-maintenance motors and a one-use thermal fuse mean these fans will be up to the task for years. Straightforward installation into any 120V system with detailed instructions, templates, and diagrams. Many sizes available. A great way to give slow vents a boost. Conforms to UL STD 507, Certified to CSA STD C22.2 #1113

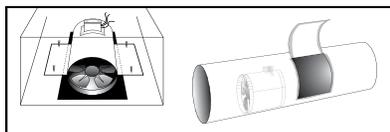

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-AF6	Duct Fan 6" dia., 240 CFM, 37W	EA	1
625-AF8	Duct Fan 8" dia., 420 CFM, 37W	EA	1
625-AF10	Duct Fan 10" dia., 650 CFM, 35W	EA	1
625-AF12	Duct Fan 12" dia., 975 CFM, 65W	EA	1
625-AF14	Duct Fan 14" dia., 1350 CFM, 65W	EA	1

Take an additional 5% off



Roof Flashing *Oatey*

Easy to install. The no-caulk flashing slips over vent stack and automatically adjusts to pipe size and roof angle. 24 gauge galvanized steel.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-11830	Roof Flashing – 1/2" – 3/4" – 1"	EA	12
5-11840	Roof Flashing – 1-1/4" – 1-1/2"	EA	12
5-11853	Roof Flashing – 2"	EA	12
5-11866	Roof Flashing – 3"	EA	12
5-11879	Roof Flashing – 4"	EA	12

Take an additional 5% off



SNIPS

Aviation Snips

Moly alloy tool steel blade is hot drop-forged and scientifically heat-treated to provide a strong, longer lasting cutting edge. Durable serrated blades are designed to grip the metal for cutting ease. The patent pending spring on these snips is guaranteed to last for the life of the tool. Will cut 18 gauge cold-rolled steel.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-6716S	Aviation Snip – Cuts Straight – Yellow Handle	EA	6
540-6716L	Aviation Snip – Cuts Left – Red Handle	EA	6
540-6716R	Aviation Snip – Cuts Right – Green Handle	EA	6

Take an additional 5% off



540-6716S

Offset Snips

The same high quality construction as the Aviation Snips with an additional advantage – the Offset Snips allow your hand to stay above metal for cutting ease and comfort.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-6510L	Offset Snip – Cuts Left – Red Handle	EA	6
540-6510R	Offset Snip – Cuts Right – Green Handle	EA	6

Take an additional 5% off



540-6510L

TAPES

Cork Insulation Tape

Adheres firmly to all metals. Use on hot or cold pipes to stop condensation and drips.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-330	Cork Insulation Tape – 1/8" x 2" x 30' Roll – Black	EA	12

Take an additional 5% off



6-330

Foam Insulation Tape

Superior self-adhesive foam tape can be used on hot or cold pipes. Fits well around valves and fittings. Easily cut and molded.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-9718	Foam Insulation Tape – 1/8" x 2" x 30' Roll – Black	EA	12

Take an additional 5% off



6-9718

Economy Electrical Tape

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-3460	3/4" x 60' Economy Electrical Tape	EA	10

Take an additional 5% off



6-3460

Scotch 3M Super 33+ Electrical Tape

Premium grade, 7 mil thick, all-weather vinyl insulating tape. Performs continuously in a temperature ambient of up to 220°F and as low as 0°F. Resealable plastic case. Made in USA.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET33	Super 33+ Electrical Tape – 3/4" x 66'	EA	10

Take an additional 5% off



ET33

The Perfect Pad for Every Project



E Lite[®]

UltraLite[®]

CladLite[®]

Hef-T-Pad[™]

THE Black Pad[®]

With DiversiTech's complete lineup of durable equipment pads, you're sure to find the right one for any project. From our lightweight Hef-T-Pads to sturdy concrete CladLites we offer the best selection of materials and sizes so your customers get what they need. Check out the complete pad and product offering at www.diversitech.com

DIVERSITECH[®]

DIVERSITECH

www.diversitech.com

ABOUT DIVERSITECH

DiversiTech is North America's largest manufacturer of air conditioning condenser pads and a leading supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVACR) industry.

Headquartered in Atlanta, Georgia, DiversiTech manufactures a suite of products, which includes a wide range of mechanical, electrical, chemical, and structural parts for HVACR and electrical systems, and swimming pool installations. The company maintains manufacturing and distribution facilities in key U.S. locations, Europe, and in the Far East. DiversiTech has enjoyed a continued history of successful growth and has acquired industry-recognized brand names including Devco® Enterprises, Wagner® Manufacturing, The Black Pad®, Hef-T-Pad™ and Specialty Chemical.

DIVERSITECH®



6650 Sugarloaf Pkwy
Duluth, GA 30097
678.542.3600
800.995.2222
678.542.3700 Fax
www.diversitech.com
©2013 DiversiTech Corporation
DOC32356