

Max2000_® Aviation Snips



Nothing outcuts, outmaneuvers or outlasts MAX!



The Max2000 Double Cut Snip employs a best of all worlds close tolerance design for consistent performance. A curved cutting edge on the center jaw reduces cutting force required and large relief grinds on all jaws minimize drag. The double cut blades feed smoothly, cut cleanly without surface distortion, and easily navigate metal seams encountered in round metal duct and stove pipe. A self-starting point on center jaw makes short work of





Max2000 Left, Right, and Combination Aviation Snips feature alloy steel blades with serrated lower jaws for solid gripping power in sheet metals, vinyl plastics, layered metals and seams (including "S" cleats).





The Max2000 Bulldog Snip features shorter blades with a serrated lower jaw for controlled notching and trimming out to the blade tip in layered sheet metals and metal seams.




Specifications

_									
Catalog Number	Description	Cutting Application				Color	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
M2001	Standard	Cuts Left					1-3/8 (34.9)	10 (254)	14 (397)
M2002	Standard	Cuts Right	Cuts Right				1-3/8 (34.9)	10 (254)	14 (397)
M2003	Standard	Cuts Straig	ght, Left and Righ	nt			1-11/16 (42.9)	10 (254)	14 (397)
M2004	Straight Double Cut	Straight, D	ouble Cut				1-3/8 (34.9)	10 (254)	16 (454)
M2005	Bulldog	Notching a	and Trimming				1-1/16 (27)	10 (254)	13 (367)
M2006	Offset	Cuts sharp left angles, straight lines and 5" (125 mm) diameter Circles.					1-1/4 (31.8)	10 (254)	16 (454)
M2007	Offset	Cuts sharp right angles, straight lines and 5" (125 mm) diameter Circles.					1-1/4 (31.8)	10 (254)	16 (454)
CAPACITIES	Material	Aluminum	Copper	Stainless Steel 22 Gauge	Galvanized Steel 22 G	auge	Mild Steel 22 Gauge		
M2004	inches (mm)	0.40 (1.02)	0.34 (0.86)	_	0.34 (0.86)		0.30 (0.76)		
	Material	Aluminum	Copper	Stainless Steel 20 Gauge	Galvanized Steel 18 G	auge	Mild Steel 18 Gauge		
All other Max	Snips inches (mm)	0.62 (1.57)	0.54 (1.37)	0.38 (0.97)	0.54 (1.37)		0.48 (1.22)		

REPLACEMENT SPRING M2000S - Fits all Max2000 Snips in this catalog.



Aviation Snips[™]

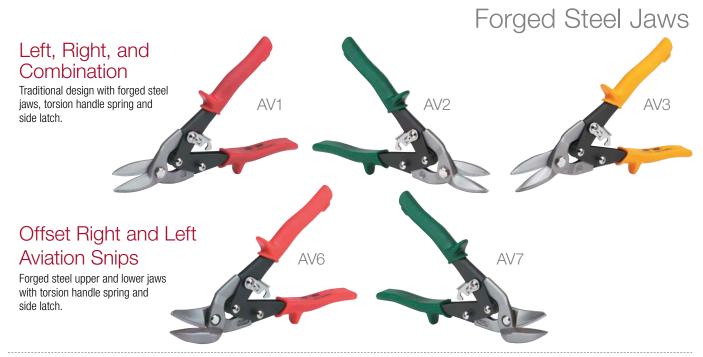

Pattern, Bulldog & Duckbill Snips





Maneuver and cut easily to very tip of blade. Cut sheet metal, aluminum and steel siding, plastics and other thin materials without tearing or catching.

Specifications

Catalog Number	Description	Cutting App	dication			Grip Color	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
			nication i			Grip Color		` '	
AV1	Standard	Cuts Left					1-3/8 (34.9)	9-5/8 (245)	14 (397)
AV2	Standard	Cuts Right	Cuts Right				1-3/8 (34.9)	9-5/8 (245)	14 (397)
AV3	Standard	Cuts Straigh	nt, Left and Righ	t		0	1-1/2 (38.1)	9-7/8 (251)	14 (397)
AV6	Offset	Cuts sharp	left angles, straiç	ght lines and tight diameter cir	cles	•	1-1/4 (31.8)	9-5/8 (245)	15 (425)
AV7	Offset	Cuts sharp right angles, straight lines and tight diameter circles					1-1/4 (31.8))	9-5/8 (245)	15 (425)
Catalog						Length of Cut	t Tool Length	Net Wt.	Net Wt.
Number	Description					in. (mm)	in. (cm)	oz. (g)	lbs. (kg)
M9	Regular Pattern Snip		3 (76.2)			12-1/2 (32)	27 (766)		
MD10	Circular "Duckbill" Snip					2-1/2 (63.5)	10 (25)	13 (369)	
MD12	Circular "Duckbill" Snip					3 (76.2)	12-1/2 (32)	27 (766)	
M15	Bulldog Pattern Snip	ulldog Pattern Snip 2-1/2 (63.5)					_	3.89 (1.77)	
CAPACITIES	Material	Aluminum	Copper	Stainless Steel 20 Gauge	Galvanized St	eel 18 Gauge	Mild Steel 18 Gauge		
Aviation Snip	s inches (mm)	0.62 (1.57)	0.54 (1.37)	0.36 (0.91)	0.52 (1.32)		0.48 (1.22)		