

BP900 Series Backflow Preventer

WITH INTERMEDIATE ATMOSPHERIC VENT FOR HEATING SYSTEMS

PRODUCT DATA



GENERAL

The Honeywell BP900 is a double check backflow preventer with an intermediate vacuum breaker designed to prevent the backflow of contaminated water into the potable water supply. Designed for the use on small supply lines, it protects against both backflow and back siphonage for continuous pressure applications.

It is ideal for boiler feed lines, livestock drinking fountains, trailer park water hook-ups, laboratory equipment and numerous other applications. Suitable for either cold or hot water service, the BP900 is designed for non-continuous backflow temperatures up to 250 °F (121 °C) and working supply pressures up to 175 psi (1207 kPa).

FEATURES

- Double check design with vacuum breaker.
- Available with 1/2 and 3/4 in. threaded female union connections, 1/2 in. drain.
- All bronze casting with brass connection.
- All working parts are stainless steel.
- Stainless steel screen to protect seals.
- Approved by A.S.S.E. Standard 1012.

OPERATION

Under static, no flow conditions, the two check valves are held tightly closed by spring pressure while the vent (or drain port) is also closed. During periods of flow, the checks open and the vent remains closed. The primary check and vent seals are uniquely tied together to insure they function simultaneously to prevent undesirable spillage while under pressure.

- When conditions occur to create backflow due to back pressure, the checks close and the drain opens. Any leakage past the downstream check will flow through the drain, preventing a build-up of pressure against the primary check. When a back-siphonage condition occurs, the checks again close and air is admitted to the chamber between the checks, eliminating any chance for contaminated water to be drawn into the supply line.

Contents

Features	1
General.....	1
Operation.....	1
Specification	2
Installation	2
Ordering Information	2



SPECIFICATIONS

Size:

BP900 1/2 in.
BP901 3/4 in.

Connection Size: 1/2 - 3/4 in. Female NPT.

Weight: 1.2 lbs (0.5 kg).


Maximum Temperature: 250 °F (121 °C).

Maximum Pressure: 175 psi (1207 kPa).

Dimensions: 4-7/8 x 2-1/2 in. (124 x 64 mm).

INSTALLATION

The BP900 is designed to vent water under certain conditions; therefore, it must always be supplied with a drain line whenever there is possibility of water damage. Always install where it is easily accessible for maintenance. To minimize water hammer shock, the backflow preventer should be located as close as possible to the fixture or appliance served. Install on up stream side of any boiler feed water pressure regulator for supply pressure considerations.

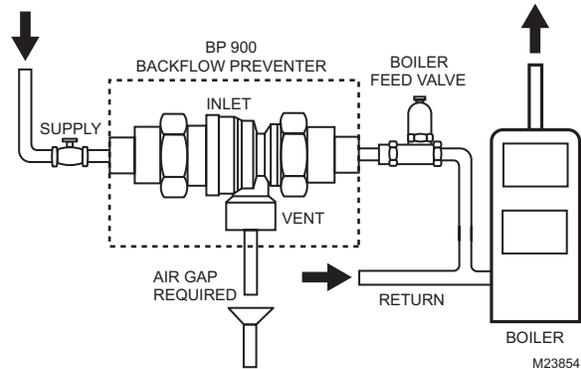

ORDERING INFORMATION

When purchasing replacement and modernization products from your TRADELINE® wholesaler or distributor, refer to the TRADELINE® Catalog or price sheets for complete ordering number.

If you have additional questions, need further information, or would like to comment on our products or services, please write or phone:

1. Your local Honeywell Automation and Control Products Sales Office (check white pages of your phone directory).
2. Honeywell Customer Care
1885 Douglas Drive North
Minneapolis, Minnesota 55422-4386

In Canada—Honeywell Limited/Honeywell Limitée, 35 Dynamic Drive, Toronto, Ontario M1V 4Z9.

International Sales and Service Offices in all principal cities of the world. Manufacturing in Australia, Canada, Finland, France, Germany, Japan, Mexico, Netherlands, Spain, Taiwan, United Kingdom, U.S.A.

Automation and Control Solutions

Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422
customer.honeywell.com

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Toronto, Ontario M1V 4Z9

Honeywell

