



Large Bin Cart System Ice Storage

Models

T LBCS1360





Cart Measurements:

- 36" H x 22.5 " W x 33.5" L
- 91.4 H x 57.2 W x 85.1 cm

Tote Measurements:

- 13.5" H (grab lip of 3.5") x 8.35" W x 9" L
- 34.3 H (grab lip of 8.9) x 21.2 W x 22.9 L cm

LBCS1360 includes: adjustable flanged legs, 1.5-3.5"(38.1-88.9mm) ice machine adapter with filler panels to fit most single ice machine configurations, 2- ice carts with spacer and 6 convenient ice totes, 2– external storage hooks to hang included 48" paddle and NSF ergonomic ice scoop with thumb and knuckle guard.

Standard Features

- Ice storage volume verified by AHRI (American Air Conditioning, Heating and Refrigeration Institute)
- First ice in / first ice out method insures fresher tasting ice
- Welded corrosive resistant 304 stainless steel front and side exterior
- Roto-molded seamless rust free polyethylene liner with 2-1" ID drains
- Bin walls foamed with non-CFS polyurethane insulation 1.5 inches thick
- Stainless steel guillotines dispense ice safely and sanitary into the insulated polyethylene ice carts
- Ice capacity for carts: ~207 lbs of ice without totes. The spacer elevates the 6-16 lbs totes for easy handling and transport. Foot operated drain allows water to drain out of the cart and into the rear drain pan then into the floor drain when cart is parked in the bay.

Warranty

- Limited 5 year parts and labor on external bin
- Limited lifetime warranty on polyethylene

Optional Accessories

- K00499 NSF 48" Paddle
- K00503 NSF 60" Paddle
- K00500 NSF 37" Shovel
- K00501 Replacement Set of 6 NSF Totes
- K00602 Replacement NSF Ice Cart
- K00504 Replacement Storage Hook
- K00463 NSF 85 oz Metal Scoop
- K00482 Hanger (required for K00461)
- K00461 NSF External Scoop Holder

Model	Application Capacity lbs (kg)	AHRI Volume CU. ft (Cu. cm)	Width in (cm)	Depth in (cm)	Height in (cm)	Shipping Weight Ibs (kg)	
LBCS1360	772 (350.2)	25 (.71)	60 (152.4)	36 (91.4)	71 (180.3)	840 (381)	
K00512 - Sleeve	386 (175.1)	13 (.37)	60 (152.4)	36 (91.4)	12 (30.5)	395 (179.2)	


Application capacity measured by 90% of the total volume in cu. ft x 33 lbs./ft3. Guillotine handle adds 4.5 inches in depth once installed. Can be slid out for easy door entry. K00512 sleeve adds 386 lbs of capacity and 12" in height to the bin. (Sold Separately)









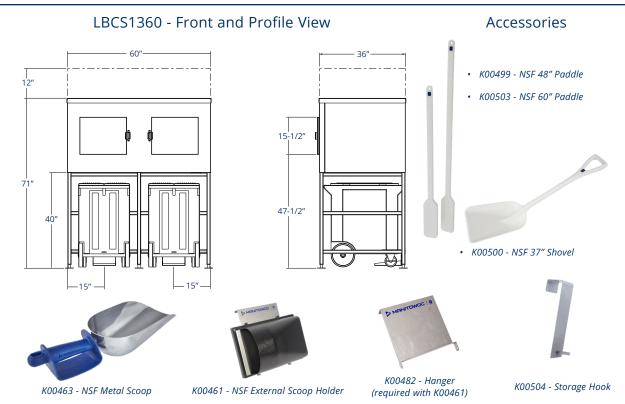

Ice Deflector Chart (Required - not included with bins)

Manitowoc Cubers	Ice Deflector Kit Numbers			
IT0450, IT0500, IF0500N, IF0600N, IT0750, IF0900, IT0900, IT1200	K00347			
IT1500, IT1900	K0034900			
IF1400C, IF1800C, IF2100C	K00382 (for single ice machine on LB0730) K00513 (for single machine on LB1448, LB1460 & LB1760) K00383 (for side-by-side ice machines)			
S3000	K00391			

^{*}Flaker and nugget machines do not require a deflector

Bin Adapter Chart

Model	Ice Makers on Bin		IT0500, IF0500N	IF0600N, IT0750	IF0900N, IT0900C, IT1200		IF1400C, IF1800C, IF2100C	RNF1100, RFF1300,		RNF0320, RNF0620, RNF1020C, RFF0320, RFF0620, RFF1220	IT1500, IT1900	IBF0620C, IBF0820C, IBT1020C	ST3000W, SF3000C
Model Width			30"	30"	30"	30"	30"	30"	22"	22"	48"	22"	48"
	1	60"	KLB613030 (included with bin)									N.A.	KLB614800
LBCS1360	3CS1360 2 60" KLB613030				KLB612222 N.A.		KLB482214	N.A.					

^{*}For side by side applications, use water-cooled, remote or ice machines with top air discharge option.

 $\label{thm:make} \mbox{Manitowoc lce reserves the right to make changes to the design or specifications without prior notice.}$