



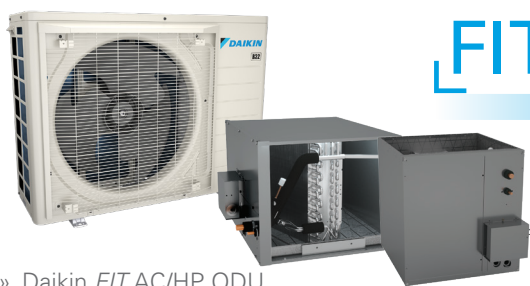

When a full system replacement is not a chosen option, a partial Daikin *FIT* AC or HP system is now a possibility. Also, the D24V Gateway offers a great comfort upgrade solution for homes with only heating/furnaces.

The Daikin D24V Gateway allows you to connect to any non-communicating gas furnace when a communicating indoor unit is not a chosen option when installing with the Daikin *FIT* condenser and coil. The D24V Gateway is compatible with the following:

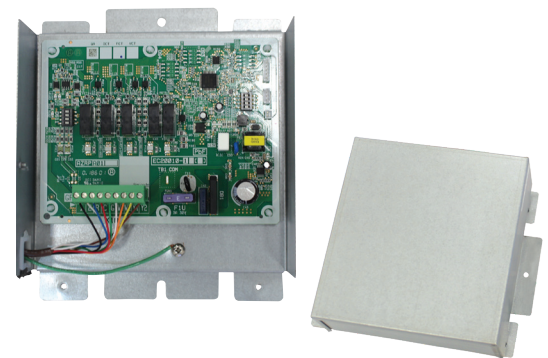

[FIT]



Compatible with all
Non-Communicating Gas Furnaces
(Any Manufacturer)!
Compatible with North and
Southeast models only.

- » Daikin *FIT* AC/HP ODU
- » CAPEA / CHPEA / CAHEA EEV Coil
- » Daikin *ONE*+ and Daikin *ONE* touch smart thermostats
- » Daikin *ONE* ecosystem line of IAQ solutions compatible (see below)



DAIKIN *ONE*+ AND DAIKIN *ONE*
TOUCH SMART THERMOSTATS



DAIKIN *ONE*
HOME AIR MONITOR



DAIKIN *ONE*
POWERED VENTILATOR



DAIKIN *ONE*
PREMIUM AIR CLEANER

Required Components




Daikin <i>FIT</i> Air Conditioner	
Tonnage	Model
1.5	DC6VSS1810
2.0	DC6VSS2410
2.5	DC6VSS3010
3.0	DC6VSS3610
3.5	DC6VSS4210
4.0	DC6VSS4810
5.0	DC6VSS6010

Daikin <i>FIT</i> Heat Pump	
Tonnage	Model
1.5	DH6VSA1810
2.0	DH6VSA2410
	DH7VSA2410
	DH9VSA241C
2.5	DH6VSA3010
3.0	DH6VSA3610
	DH7VSA3610
	DH9VSA361C
3.5	DH6VSA4210
	DH7VSA4210
4.0	DH6VSA4810
	DH7VSA4810
5.0	DH6VSA6010
	DH7VSA6010

EEV A-Coil	
Vertical	Horizontal
CAPEA2418B3	CHPEA2422B3
CAPEA2418C3	CHPEA3026B3
CAPEA3022B3	CHPEA3026C3
CAPEA3022C3	CHPEA3626B3
CAPEA3626B3	CHPEA3626C3
CAPEA3626C3	CHPEA4830D3
CAPEA4830C3	CHPEA6030C3
CAPEA4830D3	CHPEA6030D3
CAPEA6030C3	CAHEA3630C3
CAPEA6030D3	
CAHEA3630C3	

Daikin <i>ONE+</i> smart thermostat
DTST-CWBSA-NI-A
Daikin <i>ONE</i> touch smart thermostat
DTST-LTE-LA-ADTST-T0U-A



D24V Gateway
DTA119A73

Enjoy the fantastic features of Daikin *FIT* inverter side discharge unitary outdoor unit! As low as 45dBA (Quiet Mode), compact footprint, lightweight, Daikin Swing compressor, Blue Fin corrosion coating and multiple mounting options (wall, 4" from wall, patio, balcony, stackable). Learn more at www.daikincomfort.com/go/daikinfit/.

Quick Mount

Mount the D24V Gateway adaptor for R-32 AC (R-32/R-410A) and HP (R-32 only) on a place which has sufficient strength and stability. To avoid damage to the DTA119A73, DO NOT mount the adaptor to any:


- » Supply duct.
- » In a place that has risk of vibration or water droplets.
- » Directly to any air handler, furnace, hot water coil or evaporator coil in the area.



Dehumidification

Field selectable dehumidification settings to accommodated homeowner preferences

- » It is recommended to use setting "B" as a starting point and adjust as applicable for region or customer preference. Refer to page 12 of the installation manual.



Compatible only with the following items: Daikin *FIT* AC/HP, CAPEA, CAHEA or CHPEA cased coils and Daikin *ONE+* thermostats. North and Southeast models only.

DTA119A72 is still a viable D24V gateway solution for both R-32 and R-410A Daikin *FIT* AC, **but not R-32 HP**. All future produced D24V Gateways will be DTA119A73 and will be compatible with both AC and HP listed in this flyer.

To learn more, visit www.daikincomfort.com and/or www.daikincity.com today!

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2025 DAIKIN COMFORT TECHNOLOGIES, INC. · Houston, Texas · USA · www.daikincomfort.com

PF-D24V_09-25