

KP0500

Koolaire Ice Cube Machine

KDP0500A | KYP0500A | KDP0500W | KYP0500W

ICE SHAPES



► Half-Dice: 3/8" x 11/8" x 7/8" (0.95 x 2.86 x 2.22 cm)



▶ Dice: 7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)

SIZE

- ▶ Up to 522 lbs(237 kgs) of daily ice production
- → 30"(76.20 cm) wide, 34"(72.4 cm) deep, and 65.5 (166.37 cm) high on 6"(15.24 cm) legs
- ▶ 532 lb (241 kgs) ice bin storage capacity*
 - *Application capacity based on 90% volume x 33 lbs./ft³ average density of ice

SPECIFICATIONS

Refrigerant: R290

BTU Per Hour

- > 7,515 (average)
- > 8,905 (peak)

Operating Limits

- ▶ Ambient temperature range: 40° to 110°F (4.4° to 43.3°C)
- ▶ Water temperature range: 40° to 90°F (4.4° to 32.2°C)
- ▶ Water pressure ice maker (water in)
- Min. 20 psi (137.9 kPA)
- Max. 80 psi (551.1 kPA)
- ▶ Condenser inlet water in (water-cooled only)
- Min. 20 psi (137.9 kPA)
- Max. 275 psi (1,896.06 kPA)

Power

- ▶ 115/60/1 standard
- Minimum circuit ampacity:
- Air-cooled: 12.5 - Water-cooled: 11.8
- Maximum Fuse Size
- Air-cooled: 20 Amps- Water-cooled: 20 Amps

FEATURES / BENEFITS

- ▶ AHRI performance certified
- ▶ Energy-efficient models (see EnergyStar.gov)
- ▶ Durable nickel-plated copper evaporators (Made in Manitowoc, WI)
- ▶ Simple 3-position control: ON / OFF / CLEAN
- ▶ Smudge-resistant stainless-like exterior
- > R290 offers a 99.86% GWP reduction compared to R410A
- ▶ Front-facing evaporator for easy access
- ▶ One-touch cleaning—just add chemical, no ice removal needed
- ▶ Tool-free removal of food zone components
- > Smooth, white plastic interior for quick wipe-downs
- ▶ Sealed food zone with commercial-grade gaskets
- > Alpha San antimicrobial protection in key parts

ACCESSORIES

- LuminIce® II Virus and Bacteria Inhibitor Controls viruses and bacteria in the ice machine.
- Dispenser Bin Thermostat Kit Reduces condensation when used with dispensers.
- ▶ Arctic Pure Pro water filters reduce chlorine, taste, odor and filter sediment down to 5 microns



Luminice II



Thermostat Kit



Arctic Pure Water Filters



KP0500

Koolaire Ice Cube Machine


KDP0500A | KYP0500A | KDP0500W | KYP0500W

INSTALLATION

Ice machine must be installed indoors.

Recommended clearance for top and sides is 8" (20.3 cm) back is 5" (12.7 cm)

- A Electrical Entrance (2) Options
- **B** 3/8"(0.95 cm) F.P.T. Ice Making Water Inlet
- C 1/2"(1.27 cm) F.P.T. Ice Making Water Outlet
- D 1/2" (1.27 cm)
 Condenser Water Outlet
 (water cooled models only)
- E 3/8"(0.95 cm) F.P.T. Condenser Water Inlet (water cooled models only)
- F 3/4" (1.91 cm) Bin Drain

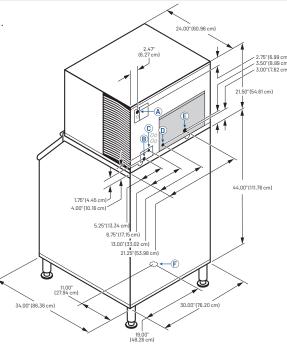

SPACE-SAVING DESIGN



	0500	
IV.	-570	
	'1.5" .61 cm	
3	0.0"	

	K-400	K-570	
Height	59.50" 151.13 cm	71.5" 181.61 cm	
Width	30.0" 76.2 cm	30.0" 76.2 cm	
Depth	34.0" 86.36 cm	34.0" 86.36 cm	
Bin Storage	365 lbs 165 kgs	532 lbs 241 kgs	

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the volume x 33 lbs/ft³ average density of ice. Ice machine and bin sold separately.

SPECIFICATIONS

			Ice Production 24 Hours			;	Power Usage	Potable water usage		
		Model	Ice Shape	Shipping Weight	70°Air/50°F Water 21°Air/10°C Water		90°Air/70°F Water 32°Air/21°C Water		kWh per 100 lbs of ice @ 90° Air/70°F Water	L per45.4kgs ice r(32° Air/21°C Water)
Water Air Cooled Cooled	eq	KDP-0500A	Dice	157 lbs (71.2 kgs)	502 lbs	228 kgs	391 lbs	177 kgs	5.5 ★	14.3 gal (54.1 L)
	မို ပိ	KYP-0500A	Half-Dice	157 lbs (71.2 kgs)	521 lbs	236 kgs	422 lbs	191 kgs	5.0 ★	13.6 gal (51.5 L)
	led	KDP-0500W	Dice	159 lbs (72 kgs)	478 lbs	217 kgs	419 lbs	190 kgs	4.1	13.8 gal (52.2 L)
	ပိ	KYP-0500W	Half-Dice	159 lbs (72 kgs)	522 lbs	237 kgs	450 lbs	205 kgs	3.6	13.8 gal (52.2 L)

Water-cooled condenser water usage per 100 lbs (45.4 kgs) of Ice: 142 gal (537 L).

★ Energy Star Model

Limited Commercial Warranty

Ice Maker Three (3) years parts and labor
Evaporator Five (5) years parts and labor
Compressor Five (5) years parts, three (3) years labor



















2110 South 26th Street | Manitowoc, WI 54220 | United States +1.920.682.0161 | 920.683.7589 Fax | manitowocice.com