

iP0500

Manitowoc Ice Cube Machine

IDP0500A | IRP0500A | IYP0500A
IDP0500W | IYP0500W | IRP0500W



Get the App!



Indigo NXT Series iP0500
Ice machine on D570 bin.
Ice machine and bin sold separately.

ICE SHAPES



▶ **Half-Dice:** 3/8" x 1 1/8" x 7/8"
(0.95 x 2.86 x 2.22 cm)



▶ **Dice:** 7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)



▶ **Regular:** 1 1/8" x 1 1/8" x 7/8"
(2.86 x 2.86 x 2.22 cm)

SIZE

- ▶ Up to 516 lbs (234 kgs) of daily ice production
- ▶ 30" (76.20 cm) wide, 34" (86.36 cm) deep, and 71.5" (181.61 cm) high on 6" legs
- ▶ 532 lb (241 kgs) ice bin storage capacity*

*Application capacity based on 90% volume x 33 lbs./ft³ average density of ice

SPECIFICATIONS

Refrigerant: R290

- ▶ Air-cooled: 150 g
- ▶ Water-cooled: 150 g

BTU Per Hour

- ▶ 8,800 (average)
- ▶ 10,570 (peak)

Operating Limits

- ▶ Ambient temperature range: 35° to 110°F (1.7° to 43.3°C)
- ▶ Water temperature range: 40° to 90°F (4.4° to 32.2°C)
- ▶ Water pressure ice maker (water in)
 - Min. 20 psi (137.9 kPa)
 - Max. 80 psi (551.1 kPa)
- ▶ Water pressure condenser (water in)
 - Min. 20 psi (137.9 kPa)
 - Max. 275 psi (1,896 kPa)

Power: 115/60/1 and 230/60/1

- ▶ Air-cooled-115V
 - Minimum circuit ampacity: 11.7 amps
 - Maximum fuse size: 20 Amps
- ▶ Air-cooled-230V
 - Minimum circuit ampacity: 6.6 amps
 - Maximum fuse size: 15 Amps
- ▶ Water-cooled-115V
 - Minimum circuit ampacity: 11.0 amps
 - Maximum fuse size: 15 Amps

FEATURES

- ▶ Sanitation
 - Hinged front door and removable components (water trough, tube, curtain, probe, pump) allow easy interior access and cleaning.
 - Select parts feature AlphaSan[®] antimicrobial protection.
 - DuraTech[™] exterior provides superior corrosion resistance compared to stainless steel. Innovative clear coat resists finger prints and dirt.
 - Optional LuminIce[®] Growth Inhibitor helps control bacteria and yeast, with status indicator on display.
 - ▶ Sustainability & Value
 - R290 offers low global warming potential and zero ozone depletion.
 - Energy-efficient models (see EnergyStar.gov)
 - Icon-based easyTouch[®] display simplifies operation.
 - Acoustical probe and Active Sense help ensure consistent ice production.
 - 24-hour diagnostics support preventative maintenance.
 - Designed with programmable ice production to take advantage of off-peak rates and/or shut off over night to lower lifetime costs.*
 - Connect via Bluetooth for quick setup and instant machine information.
- *Based on manufacturer assumptions without independent testing. Results may vary by settings and conditions.

ACCESSORIES

- ▶ LuminIce[®] II virus and bacteria inhibitor helps control viruses and bacteria in the ice machine.
- ▶ iAuCS[®] schedules and performs routine ice machine descaling or sanitizing automatically.
- ▶ Arctic Pure[®] Pro water filters reduce sediments and chlorine contaminants down to 0.5 microns.
For optimal performance, use the Arctic Pure prefilter in combination with the Arctic Pure primary filter.



LuminIce II



iAuCS



Arctic Pure Water Filters

iP0500

Manitowoc Ice Cube Machine

IDP0500A | IYP0500A | IRP0500A | IDP0500W | IYP0500W | IRP0500W

INSTALLATION

Ice machine must be installed indoors.

Required clearance for

- top and sides: 16" (40.64 cm)
- back: 5" (12.7 cm)

A Electrical Entrance (2) Options

B 3/8" (0.95 cm) F.P.T.
Water Condenser Inlet
(water-cooled units)


C 1/2" (1.27 cm) F.P.T.
Water Condenser Outlet
(water-cooled units)

D 1/2" (1.27 cm)
Auxiliary Base Drain Socket

E 3/8" (0.95 cm) F.P.T.
Ice Making Water Inlet

F 1/2" (1.27 cm) F.P.T.
Ice Making Water Drain

G 3/4" (1.91 cm)
Bin Drain

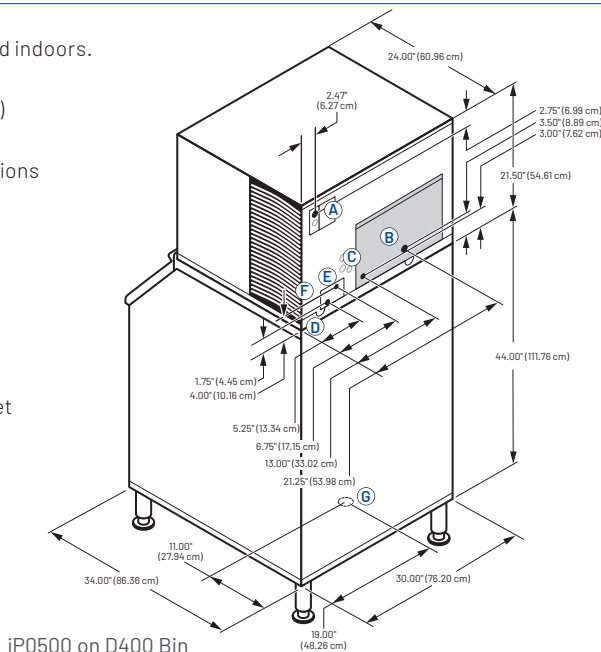

SPACE-SAVING DESIGN



	iP0500 D400	iP0500 D570
Height	59.50" 151.13 cm	71.5" 181.61 cm
Width	30.0" 76.2 cm	30.0" 76.2 cm
Depth	34.0" 86.36 cm	34.0" 86.36 cm
Bin Storage	365 lbs 165 kgs	532 lbs 241 kgs

Height includes adjustable bin legs
6.00" to 8.00", (15.24 to 20.32 cm)
set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the
volume x 33 lbs/ft³ average density of ice.
Ice machine and bin sold separately.

SPECIFICATIONS

	Model	Ice Shape	Shipping Weight	Ice Production 24 Hours		Power Usage kWh per 100 lbs of ice	Ice Machine Potable water us- age per 100 lbs ice	Condenser water usage per 100 lbs ice
				70° Air/50°F Water 21° Air/10°C Water	90° Air/70°F Water 32° Air/21°C Water			
Air Cooled	IDP0500A	Dice	149 lbs (67.59 kgs)	515 lbs (233.6 kgs)	421 lbs (190.9 kgs)	5.49 ★	14.6 gal (55.27 L)	N/A
	IYP0500A	Half-Dice	154 lbs (69.85 kgs)	516 lbs (234 kgs)	444 lbs (201.4 kgs)	5.12 ★	14.3 gal (54.13 L)	N/A
	IRP0500A	Regular	154 lbs (69.85 kgs)	509 lbs (230.8 kgs)	411 lbs (186.4 kgs)	5.52 ★	14.4 gal (54.51)	N/A
Water Cooled	IDP0500W	Dice	154 lbs (69.85 kgs)	496 lbs (224.9 kgs)	397 lbs (180 kgs)	4.85	13.9 gal (52.62 L)	135 gal (511 L)
	IYP0500W	Half-Dice	148 lbs (67.13 kgs)	509 lbs (230.8 kgs)	455 lbs (206.4 kgs)	4.32	14.2 gal (53.75)	135 gal (511 L)
	IRP0500W	Regular	154 lbs (69.85 kgs)	484 lbs (219.5 kgs)	374 lbs (169.6 kgs)	4.99	14.4 gal (54.51)	135 gal (511 L)

R290 is a refrigerant grade propane which is naturally occurring with no ozone depletion potential and extremely low global warming potential.

★ Energy Star Model

Limited Commercial Warranty

Ice Maker Three (3) years parts and labor

Evaporator Five (5) years parts and labor

Compressor Five (5) years parts, three (3) years labor



2110 South 26th Street | Manitowoc, WI 54220 | United States
+1.920.682.0161 | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2025 Pentair. All rights reserved.

